

Tokamaks and tokamak-reactors with Li Walls

Leonid E. Zakharov,

Princeton University, Princeton Plasma Physics Laboratory

Presented at EFDA-JET Seminar

February 07, 2002, Abingdon, UK

Abstract

Lithium covered walls, conformal to the plasma surface, represent a new, “LiWall”, concept for solving the problem of the “first wall” for both the next step tokamaks and the tokamak reactors. From the technical point of view, this concept relies on distribution of the power and particle flux over the large wall surface, thus, dramatically enhancing total power and particle extraction capabilities of the machines. In terms of the plasma physics, LiWalls may utilized a new, low recycling regimes with the high temperature pedestal at the plasma edge, flattened temperature profiles, suppressed thermo-conduction and enhanced stability (due to flattened q-profiles and presence of the conducting wall at the plasma boundary). At the research stage, such a confinement regime may be studied on tokamaks with the (solid) lithium coated copper shells (with a special interface layer). For the tokamak reactors, LiWalls lead to a new, “Yacht sail” design approach with a dynamically balanced first wall, intense plasma facing (liquid) lithium streams and the FLiBe neutron energy absorbing blanket layer. If developed, this design would significantly reduce the amount of activated structural elements in the neutron zone and make acceptable a pulsed tokamak reactor regime.

Supporting material for the talk can be found on the web-page <http://w3.pppl.gov/~zakharov>

OUTLINE

1. Introduction.

2. Basic properties of lithium.

(a) Gettering plasma particles by lithium.

(b) Power extraction capabilities of LiWalls.

3. Confinement and stability in low recycling regime.

4. MHD of liquid lithium.

(a) Basic Reynolds numbers.

(b) Magnetic propulsion of Intense Lithium Streams.

(c) Stabilization by Intense Li streams.

5. Yacht Sail approach for tokamak-reactors.

(a) Dynamic balancing.


(b) FLiBe blanket.

(c) Fabric-like vacuum chamber.

6. Summary.


1 Introduction

Li is an excellent getter for the hydrogen plasma particles.

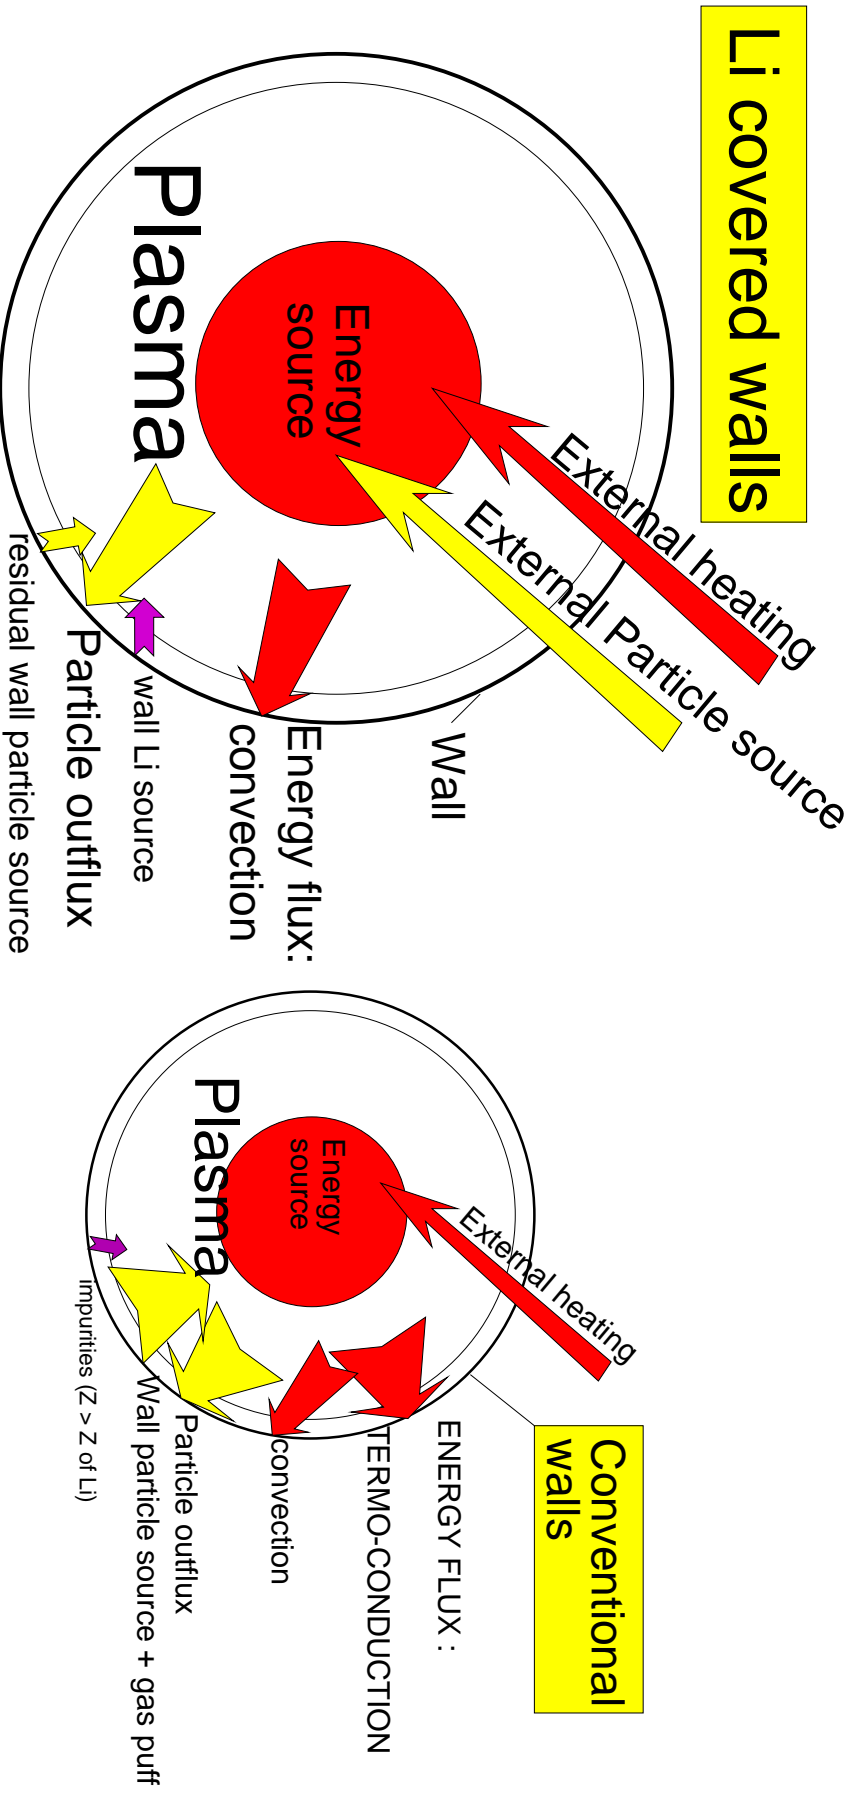

Lithium can be propelled along the walls
for power and particle extraction.

The concept of LiWalls relies on lithium covered walls conformal to the plasma (no divertor)

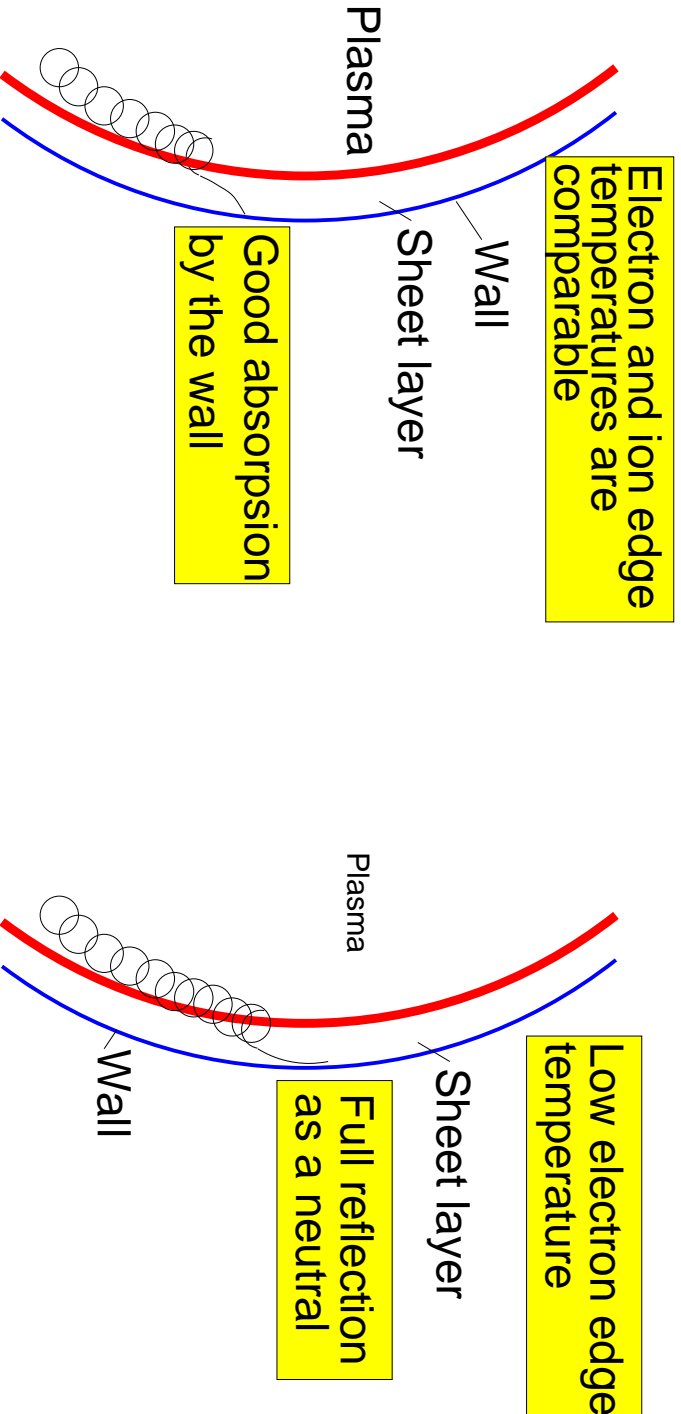

Sheet potential near the walls is determined by the electron energy,
 $E \simeq 3T_e / \rho_i$.

- Physics goal

$$n \cdot T \cdot \tau_E > 50 [10^{20} m^{-3} \cdot \text{keV} \cdot \text{sec}] \quad (1.1)$$

or

$$\beta \cdot B^2 \cdot \tau_E > 4, \quad \beta = 0.08 \frac{n \cdot T}{B^2}. \quad (1.2)$$

At present, one lane road, toward increase in τ_E . Not a reactor way.


$$P_{fusion} = 5 \frac{E_{plasma}}{\tau_E}. \quad (1.3)$$

LiWalls put a conducting wall right at the plasma edge and open a road to fusion reactor with $\beta > 10\%$.

- Confinement: peaked temperature, sawtooth oscillations, Troyon limit, turbulent transport, necessity in controlling profiles.

LiWalls rely on the low recycling regime, high edge temperature, flattened temperature, suppression (elimination) of the turbulent transport.

LiWalls make external plasma MHD control compatible with the fusion reactor:

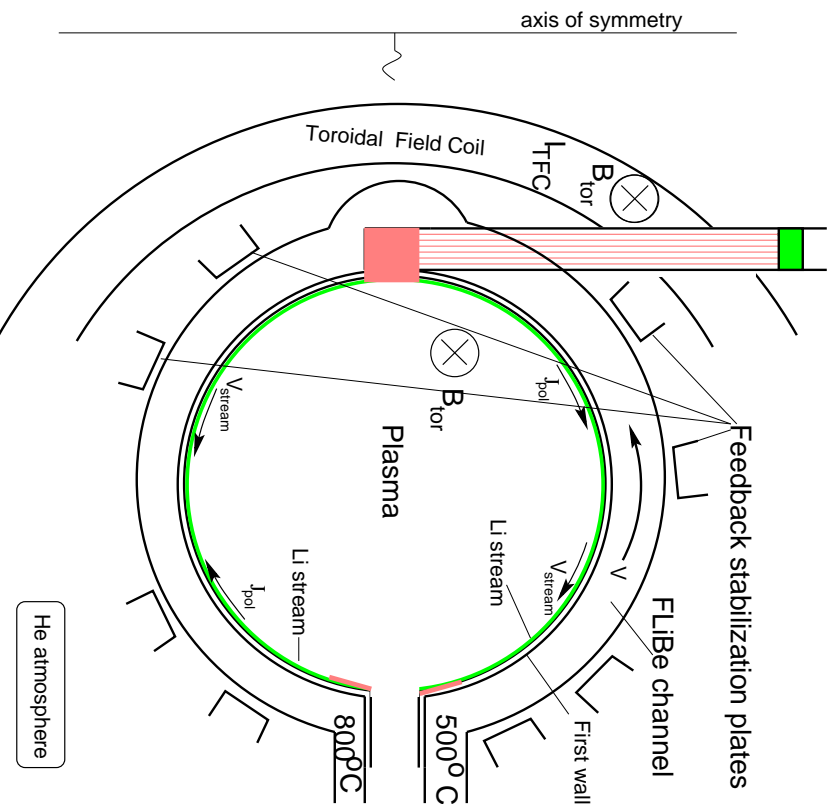

- “passive” conducting shell **right at the plasma boundary**;
- protection of feedback stabilization plates from 14 MeV neutrons;
- accessibility to feedback stabilization plates;
- no-conducting structures between feedback plates and conducting shell;
- additional stabilization by the lithium streams (for free);

- Divertor limits the power extraction by concentrating power deposition (average wall load in ITER $< 1\text{MW/m}^2$).
- Capacities of LiWalls (with distributed power deposition) exceed reactor requirements ($\simeq 15\text{MW/m}^2$).
- Neutron flux deteriorates mechanical properties of the high-Z plasma facing components and blanket structure. It produces a long lasting activation.

In LiWalls the first wall consists of fast plasma facing lithium streams and liquid FLiBe blanket (not damagable and non activatable).

"Yacht sail" design approach minimizes use of high-Z structural components.

2 Basic properties of lithium

Lithium:

| | | | |
|-------|---------------------------------|--|----------------------------------|
| 1. * | Atomic mass | 6.941 | |
| 2. * | Mass density at 600 | 0.495 $\frac{g}{cm^3}$ | half of water |
| 3. * | Melting temperature | 180.54 C° | |
| 4. * | Boiling temperature | 1347 C° | |
| 5. ** | Conductivity σ at 600° K | 3.4.10 ⁶ $\frac{1}{\Omega \cdot m}$ | 1/17.5 of copper |
| 6. * | Heat capacity c_p at 600° K | 4253 $\frac{J}{kg \cdot K}$ | like water |
| 7. ** | Thermal cond. k_T at 600° K | 47.6 $\frac{W}{m \cdot K}$ | 1 $\frac{MW}{m^2}$ at T'=210°/cm |
| 8. * | Melting heat Q_{melt} | 0.432 kJ/g | 30 % > than water |
| 9. ** | Viscosity ν at 600° K | 0.42.10 ⁻³ Pa . s | like water |
| 10. * | Surface tension at 600° K | 0.339 $\frac{N}{m}$ | |

[*] "Handbook of Physical Quantities", Ed. by Igor S.Grignoriev and Evgenii Z. Melnikov, Russian Research Center "Kurchatov Institute", Moscow, Russia. CRC press, Boca Raton, New York, London, Tokio (ISBN 0-8493-2861-6)

[**] "Handbook of Thermodynamic and Transport Properties of Alkali Metals", Editor Roland W. Ohse, Blackwell Scientific Publications, Oxford, London, Edinburgh, Boston, Palo Alto, Melbourne (ISBN 0-632-01447-4).

Derived properties of Lithium:

| | |
|---|--------------------------------------|
| 1. Volume density n_{Li} | $46.33 \cdot 10^{21} \frac{1}{cm^3}$ |
| 2. Surface density $\frac{dN_{Li}}{dS}$ | $1.29 \cdot 10^{19} \frac{1}{m^2}$ |
| 3. Line density $\frac{dN_{Li}}{dh}$ | $3.59 \cdot 10^7 \frac{1}{cm}$ |
| 4. Thickness of a monolayer | $2.78 \cdot 10^{-8} cm$ |

For a tokamak with the circular cross-section the number of plasma particles compared to the number of Li atoms on the wall surface

$$V = 2\pi R \pi a^2, \quad S_{wall} = 2\pi R 2\pi a, \quad N_{plasma} = \langle n_e \rangle V, \quad (2.1)$$


$$N_{Li} = \frac{dN_{Li}}{dS} S$$

can be calculated as

$$N_{monolayers} \equiv \frac{N_{plasma}}{N_{Li}} = \frac{\langle n_e \rangle}{2 \frac{dN_{Li}}{dS}} a = 3.87 a_{[m]} \langle n_e \rangle_{[10^{20}]} \cdot \quad (2.2)$$


Averaged Ion Range Of Deuterium incident on D-sat. Lithium

(TRIM calculations with 10000 flights by J.P.Allain, University of Illinoice, April, 2000)

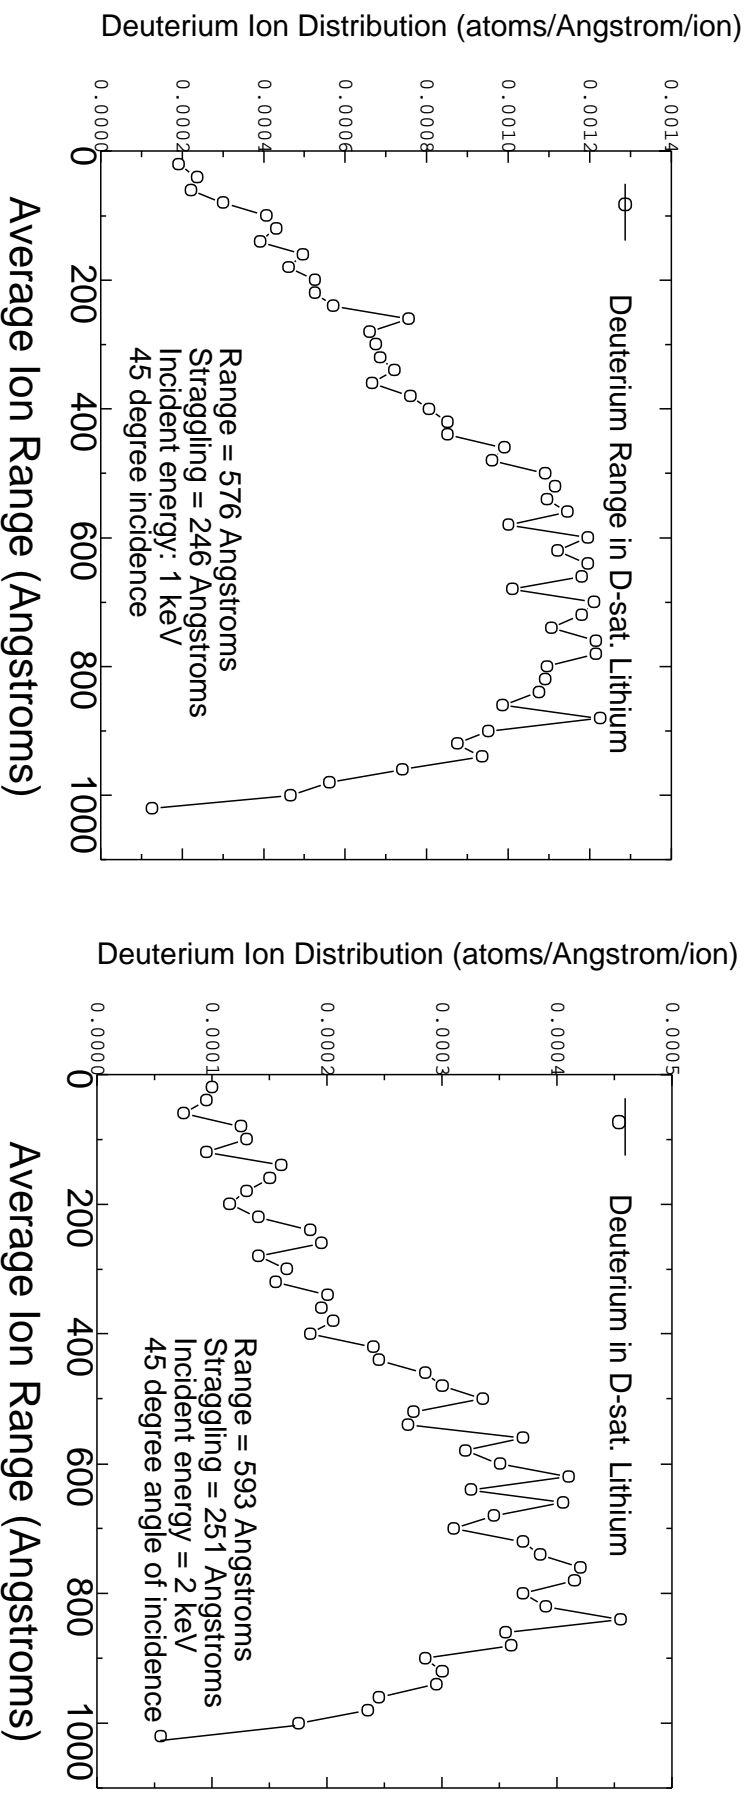

1 keV D on D-sat Li, Average Ion Range = 576 A
2 keV D on D-sat Li, Average Ion Range = 593 A

Averaged Ion Range as a function of projectile angle of incidence
(TRIM calculations with 10000 flights by J.P.Allain, University of Illinoice,
April, 2000)

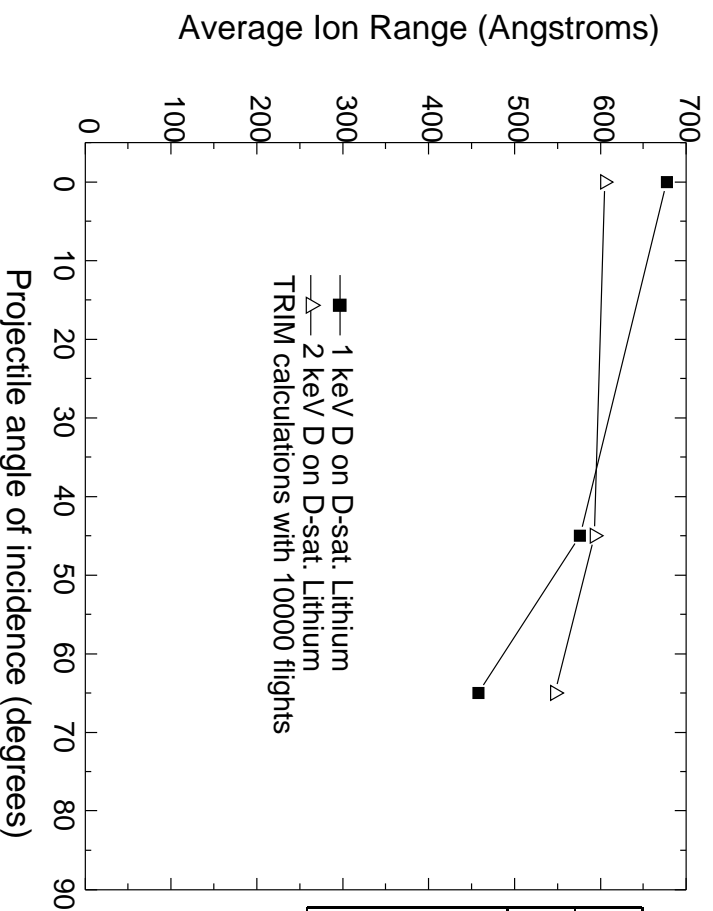


| | Average Ion Range | |
|-------|-------------------|----------|
| Angle | at 1 keV | at 2 keV |
| 0 | 677 Å | 605 Å |
| 45 | 576 Å | 593 Å |
| 65 | 458 Å | 547 Å |

For 1 keV deuterium ion more than 150 Li monolayers participate in absorption.

D+ sputtering on Li

(<http://starfire.ne.uiuc.edu/iax/iax.html>, page 33)


D+ on D-saturated Solid and Liquid Lithium Measurements (IIAX Data, J.P. Allain & D.N.Ruzic)

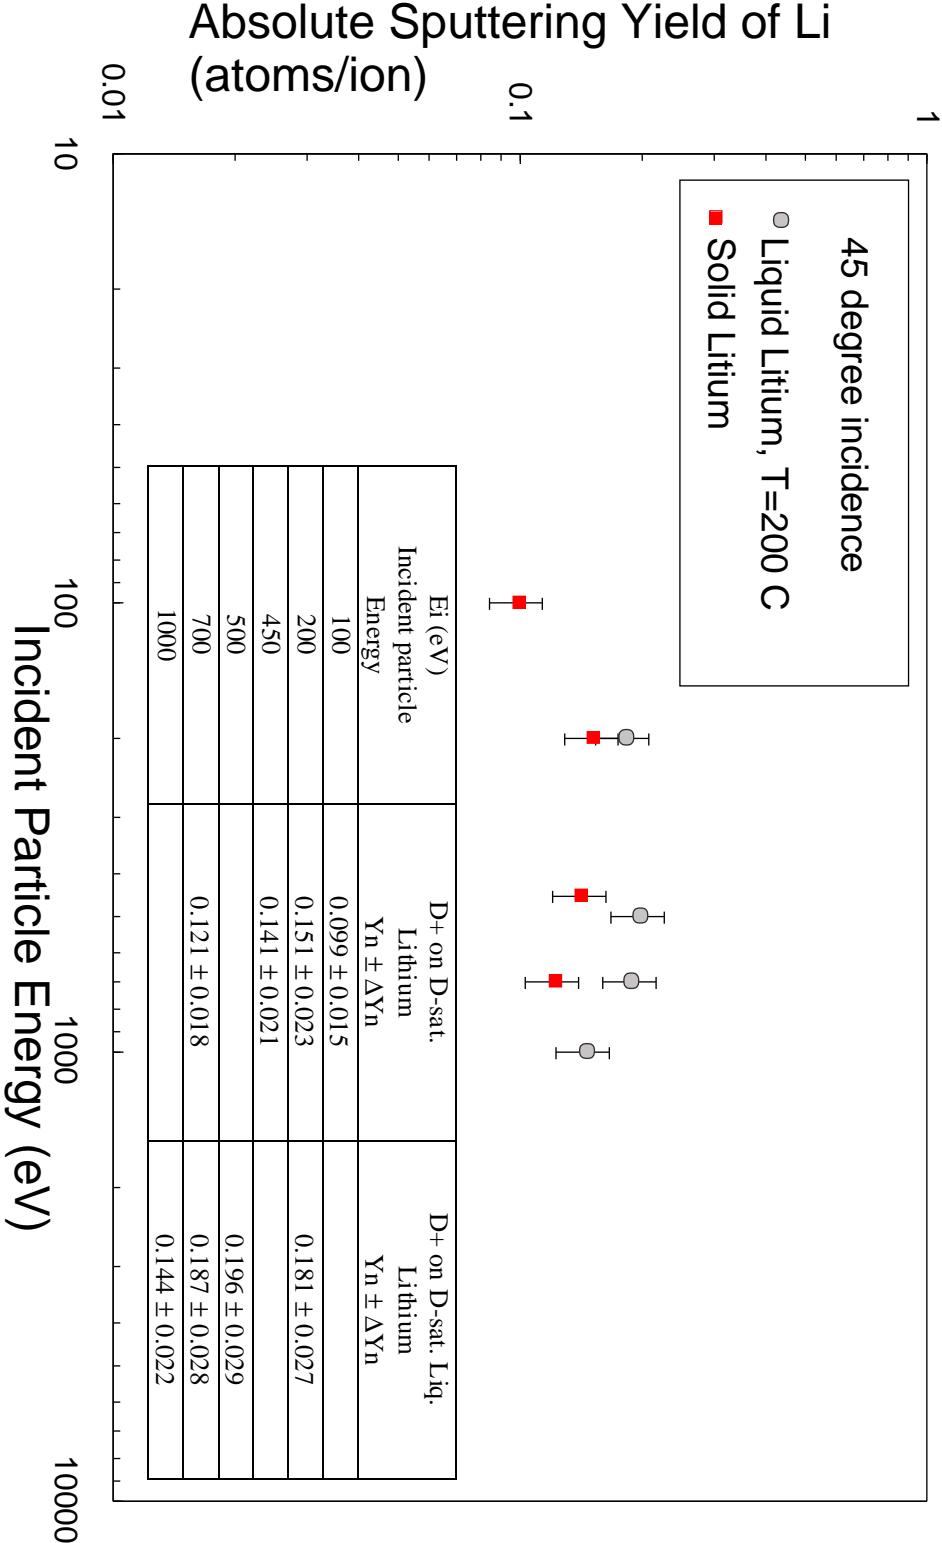

He sputtering on Li

(<http://starfire.ne.uiuc.edu/iax/iax.html>, page 34)


He+ on D-saturated Solid and Liquid Lithium Measurements (IIAX Data, J.P. Allain & D.N.Ruzic)

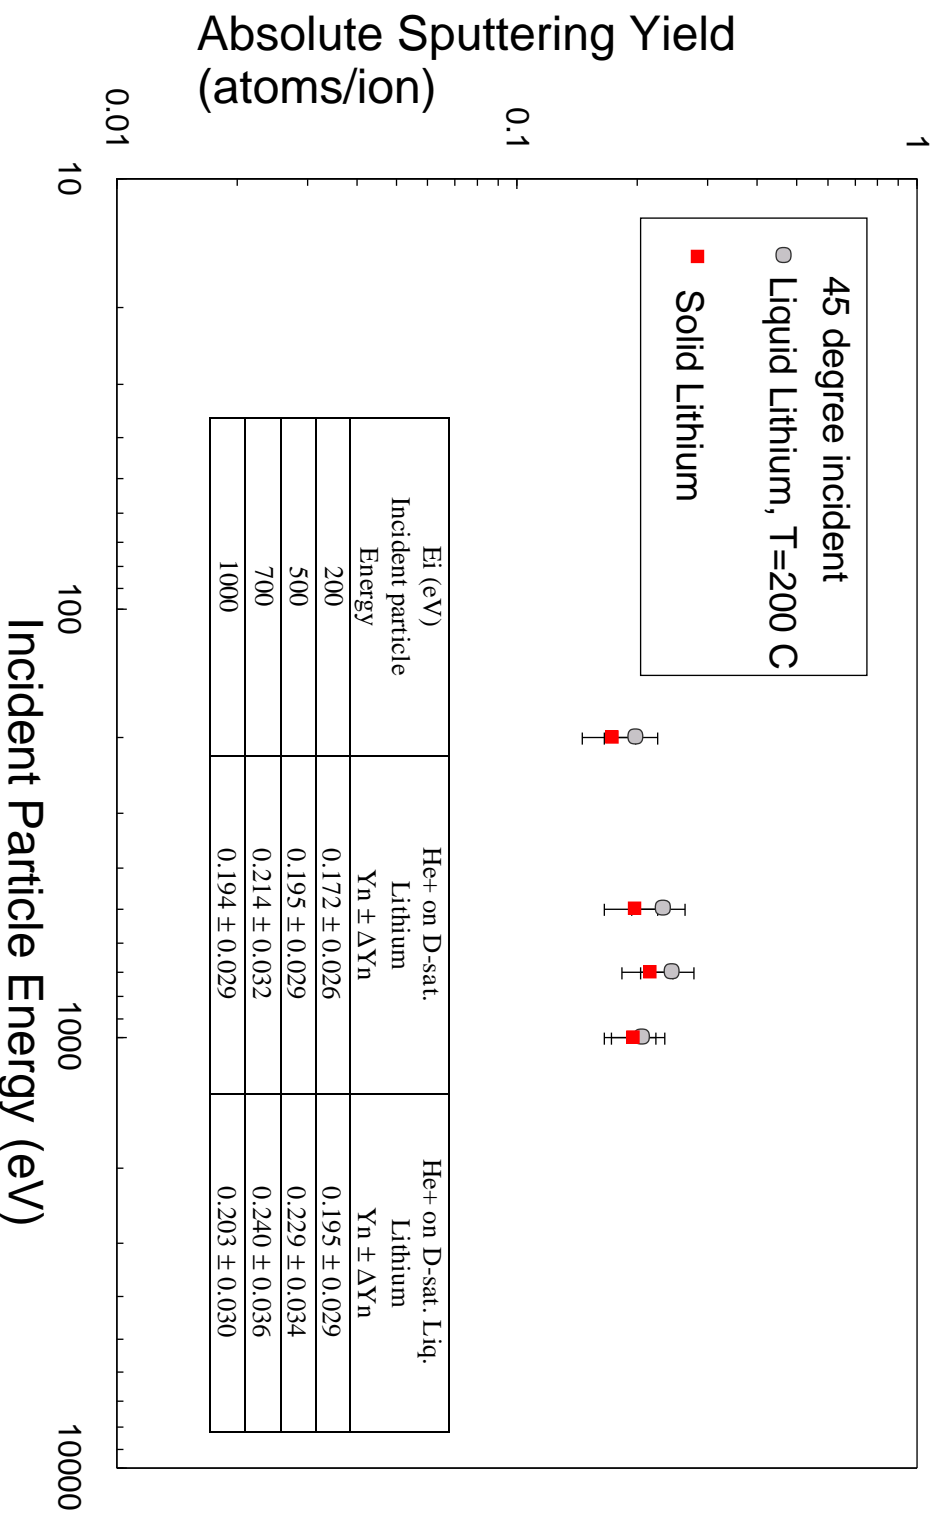

Li sputtering on Li is less than 1 (no runaway)

(<http://starfire.ne.uiuc.edu/pmi/IIAX%20Summary.pdf>, page 32)

Li on D-saturated Solid and Liquid Lithium Measurements (IIAX Data, J.P. Allain & D.N. Ruzic)

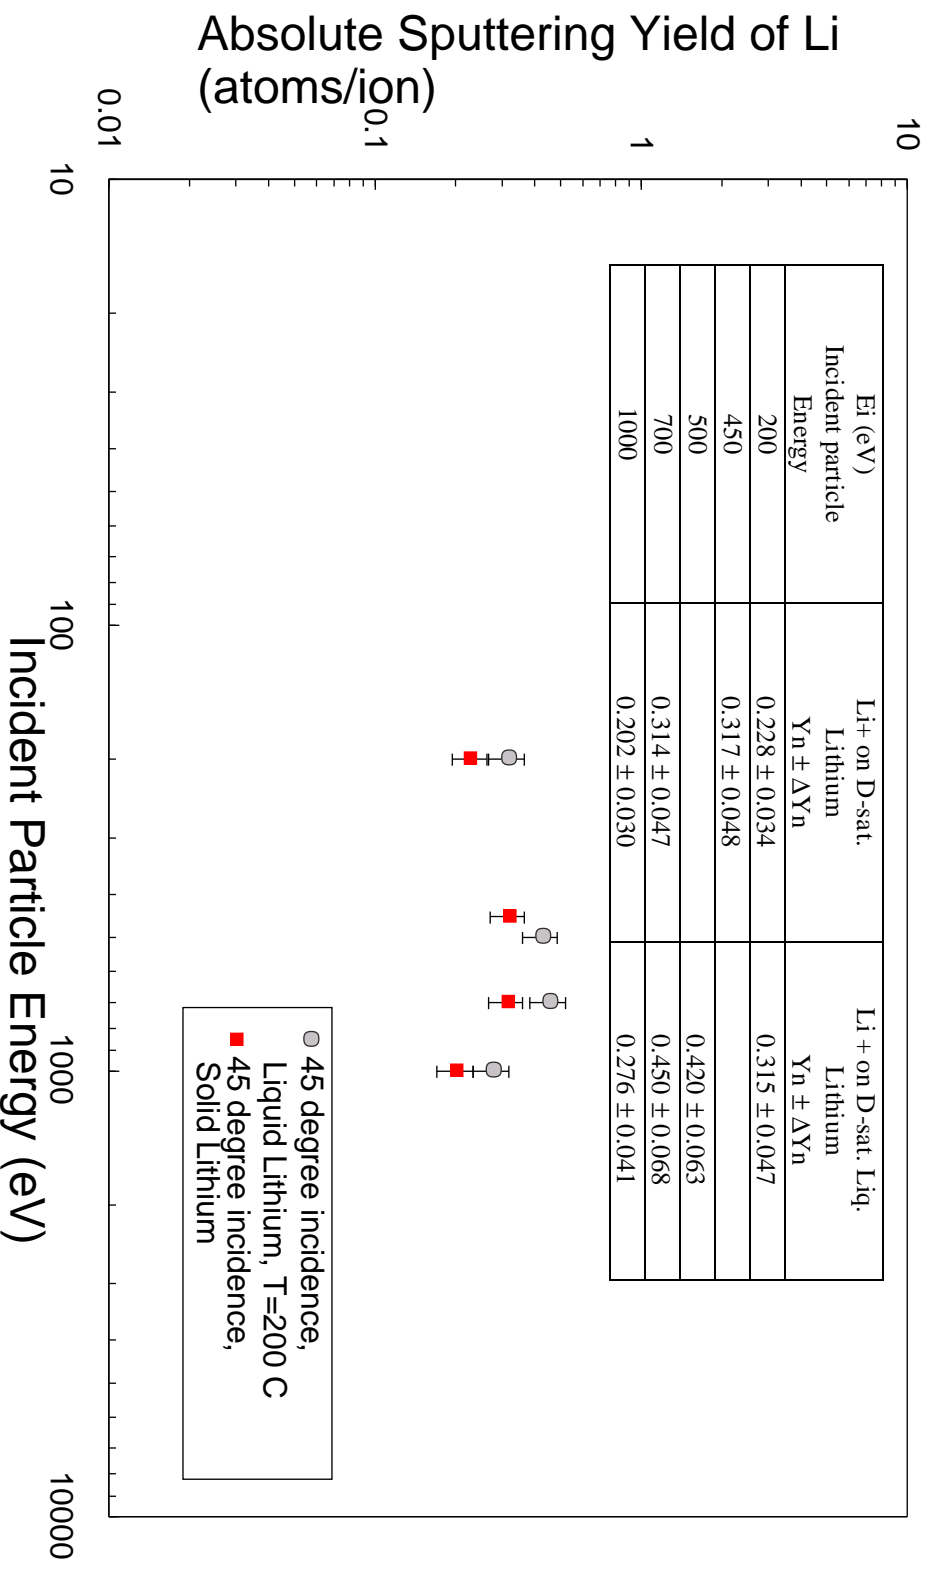

T.D.Rognien, M.E.Rensink (LLNL) “Liquid-Walls Temperature Limits”

(http://www.td.anl.gov/ALPS_Info_Center/alps/rogn_impur.pdf, ALPS/APEX Meeting, Argonne Nat. Lab.,

May 8-12, 2000)

Evaporation Li flux Γ


$$\Gamma \simeq 3.5 \cdot 10^{18} \cdot 10^{\frac{T^o - 300^o}{500}} C \left[\frac{1}{m^2 \cdot sec} \right]$$

At $T = 200^o C$

$$\Gamma \simeq 5 \cdot 10^{15} \left[\frac{1}{m^2 \cdot sec} \right]$$

T_{Li} should be less than $400^o C$.


Side-wall impurity influx sets tokamak liquid temperature limits

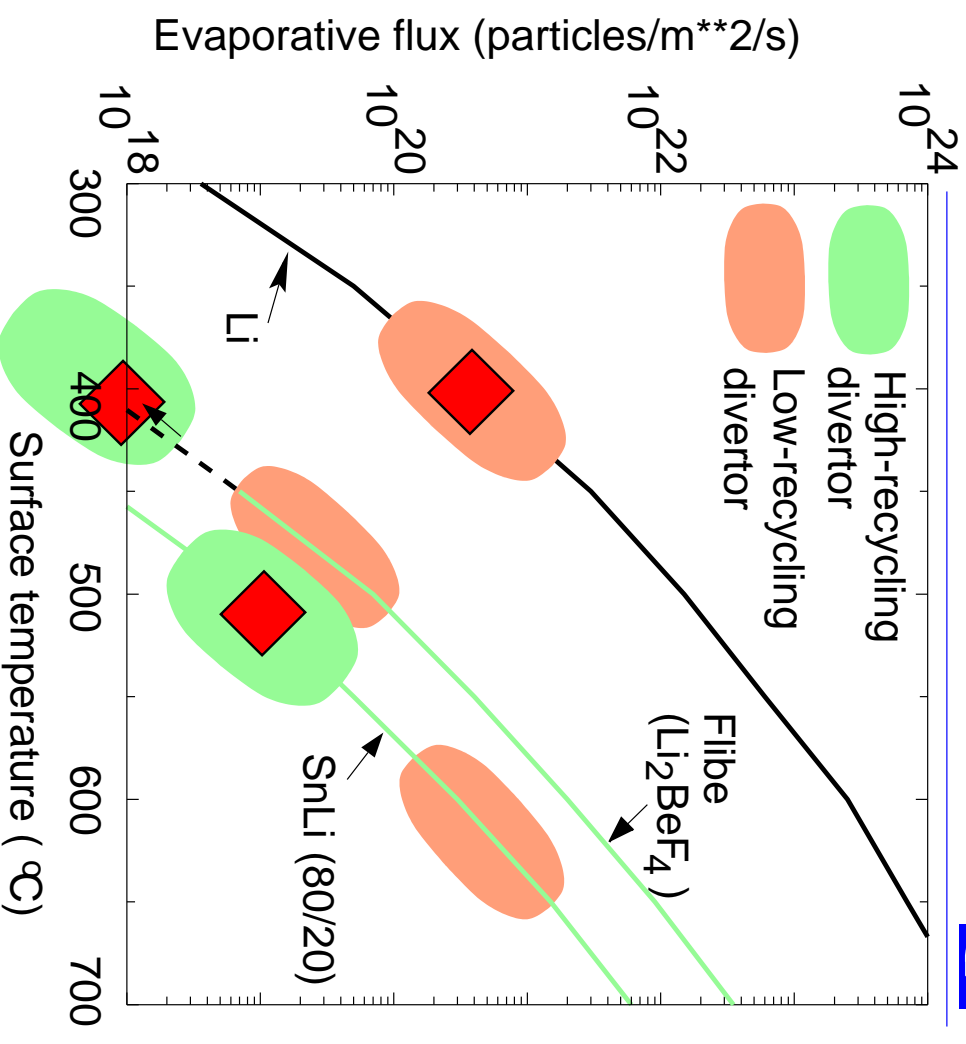

2 Gettering plasma particles by the lithium. (cont.)

Deuterium experiments with Li coated walls on T-11M (Ohmic heating, Li capillary porous limiter, gas puffing)


(<http://w3.pppl.gov/~zakharov/Mirnov010221/Mirnov.ppt>, p.19, Exper. Seminar PPPL, Feb. 21, 2001)

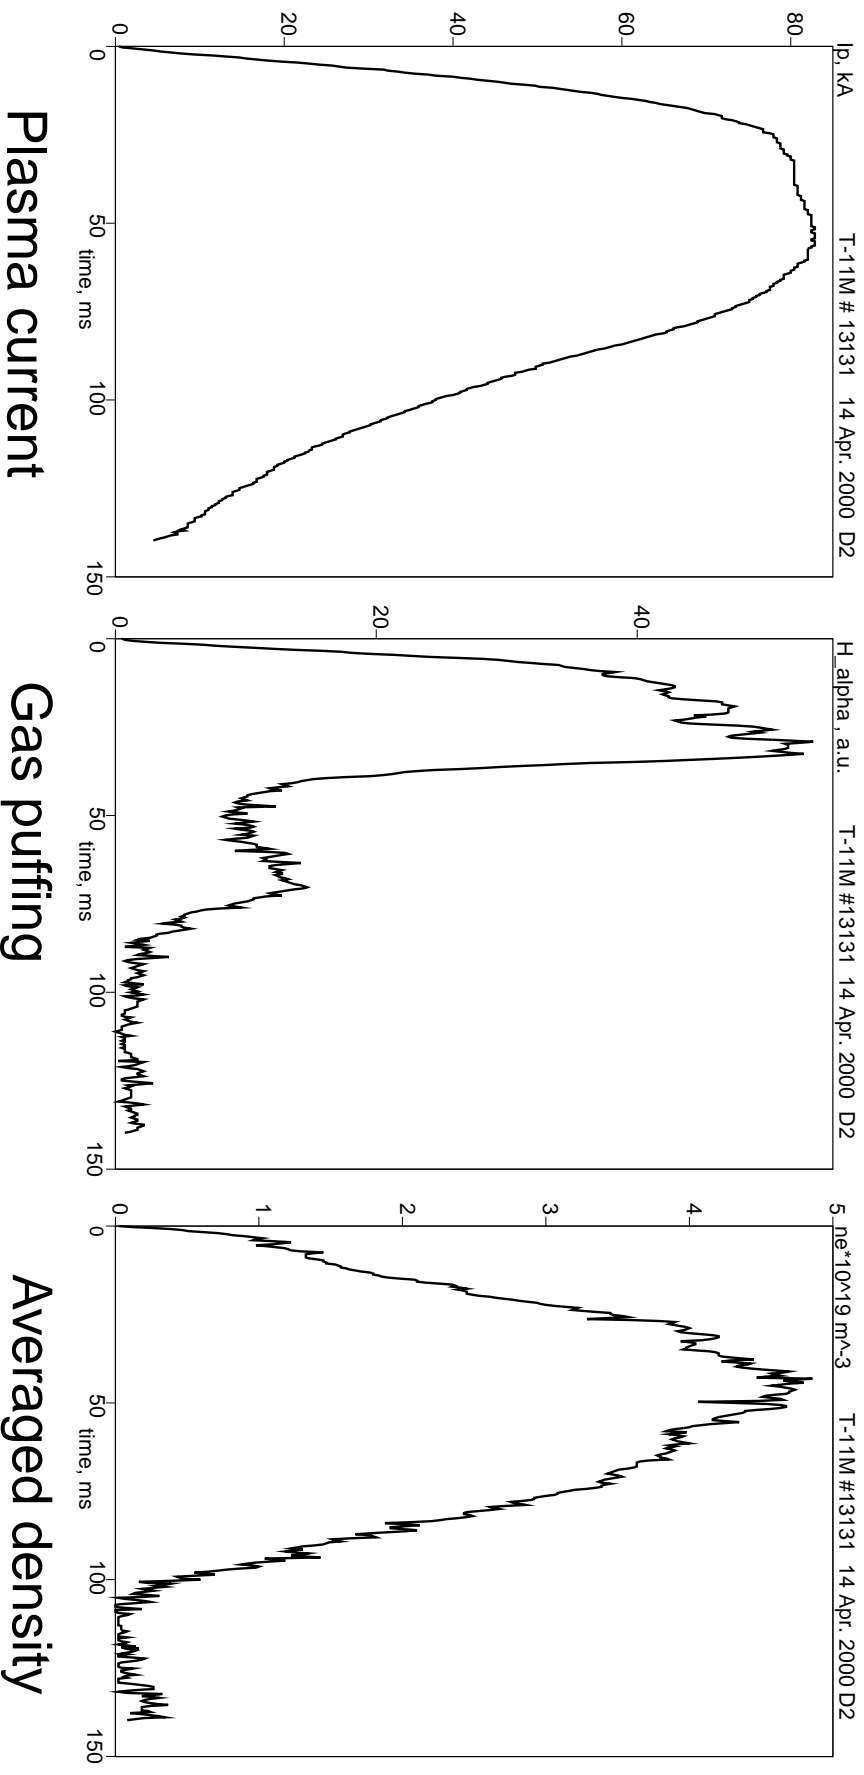

Density decays, presumably, with the particle confinement time.

Deuterium experiments with Li coated walls on T-11M.

(<http://w3.pppl.gov/~zakharov/Mirnov010221/Mirnov.ppt>, p. 18, *Exper. Seminar PPPL, Feb. 21, 2001*)

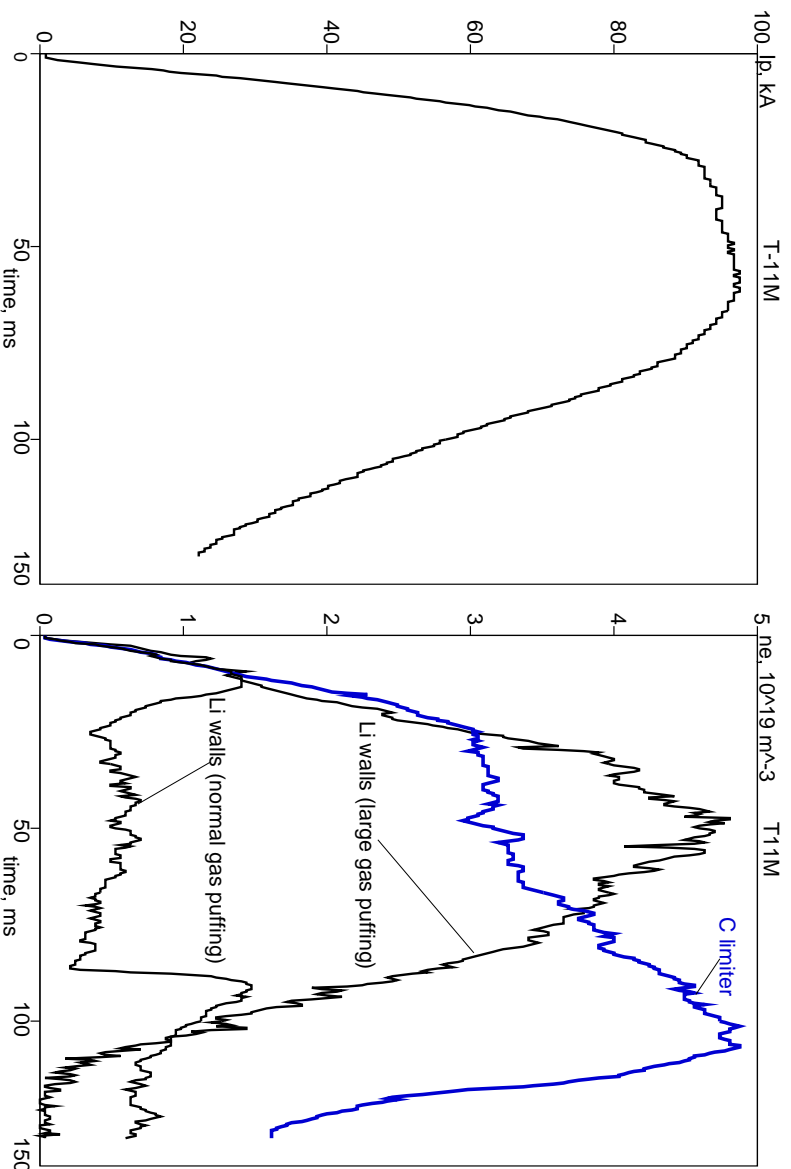


Plasma current

Averaged density

Comparison of Carbon limiter (no Li coated walls) with Li-limiter (with Li coated walls)

Helium experiments with Li coated walls on T-11M

(<http://w3.pppl.gov/~zakharov/Mirnov010221/Mirnov.ppt>, p. 16, *Exper. Seminar PPPL, Feb. 21, 2001*)

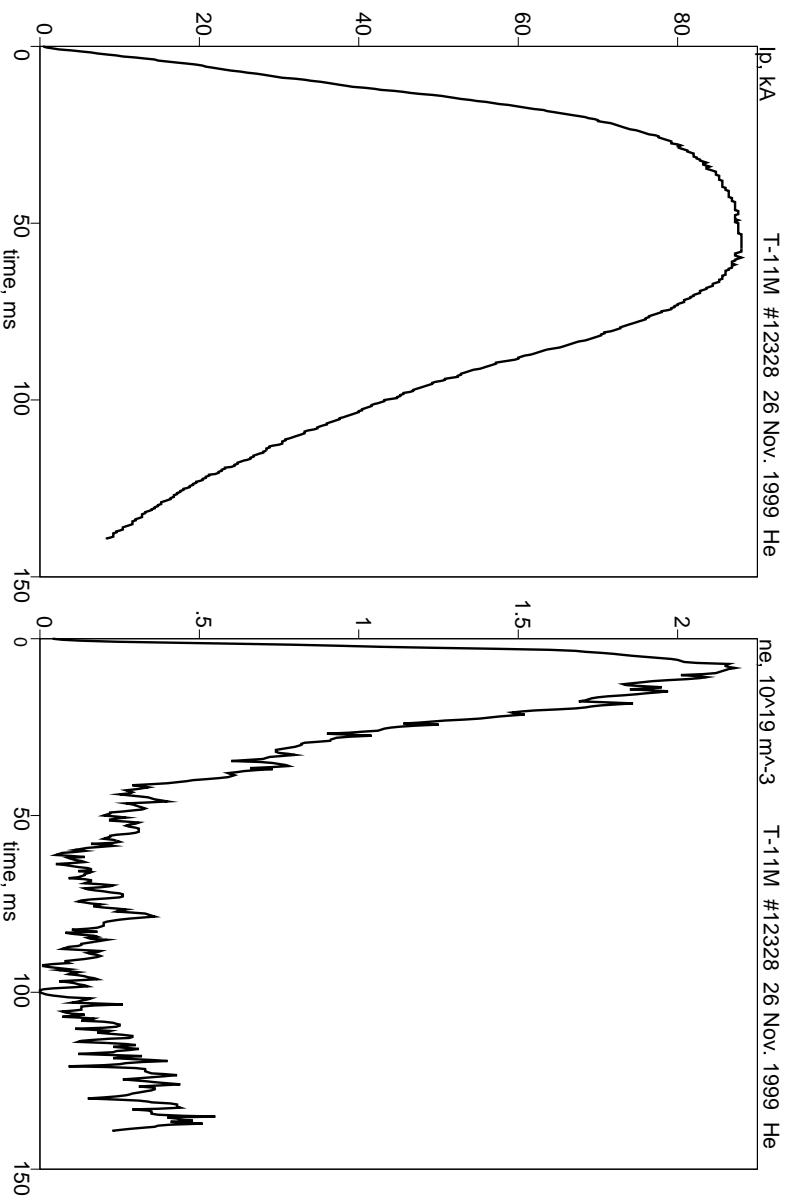

Plasma current

Averaged density

Decay of the He plasma with Li coated walls (at lower gas puffing than for deuterium).

Increase in the wall surface temperature ΔT_{Li} depends on the power flux q_{wall} as

$$\Delta T_{Li} = q_{wall} \sqrt{\frac{4t_{exposure}}{\pi \kappa \rho c_p}}, \quad d_{skin} \equiv \sqrt{\frac{\kappa t_{exposure}}{\rho c_p}},$$

where κ is the thermoconductivity, ρ is the density, c_p is the heat capacity, and $t_{exposure}$ is the exposure time.

Two types of LiWalls:

1. Lithium (sub-millimeter) coated copper walls for experimental machines.
2. Intense liquid lithium streams ($\simeq 20$ m/sec) for tokamak-reactors.

Both have extraordinary power extraction capabilities.

Intense liquid lithium streams:

$$\begin{aligned} t_{\text{exposure}} &\equiv t_{\text{flight}}, & (k_T \rho c_p)_{Li} &= 1.00 \left[\frac{J^2}{\text{sec} \cdot K^2 \text{cm}^4} \right], \\ \Delta T_{Li} &= 200^\circ \frac{q_{\text{wall}}}{3.5 \text{ MW/m}^2} \sqrt{4 t_{\text{flight}}}, \\ d_{\text{skin}} &= 2.4 \sqrt{4 t_{\text{flight}}} \text{ mm}. \end{aligned} \tag{2.3}$$

Intense lithium streams ($t_{\text{flight}} \simeq 0.25$ sec) have reactor relevant power extraction capabilities (even with no vortices in the streams)

$$q_{\text{wall}} \simeq 3.5 \text{ MW/m}^2, \quad (+14 \text{ MW/m}^2 \text{ in neutrons}),$$

while keeping wall heating low, $\Delta T < 200^\circ \text{C}$.

E.g., for a middle size tokamak-reactor

$$R = 6 \text{ m}, \quad a = 1.6 \text{ m}, \quad P_{\text{wall}} = 4\pi^2 R a q_{\text{wall}} \simeq 1.3 \text{ GW}$$

Basic properties of copper:

| | | |
|-------|---|--|
| 1. * | Atomic mass | 63.546 |
| 2. * | Mass density | $8.96 \frac{g}{cm^3}$ |
| 3. * | Melting temperature | $1083 C^\circ$ |
| 4. * | Boiling temperature | $2543 C^\circ$ |
| 5. * | Conductivity σ at $20^\circ C$ | $59.4 \cdot 10^6 \frac{1}{\Omega \cdot m}$ |
| 5a. * | Conductivity σ at $400^\circ K$ | $45.8 \cdot 10^6 \frac{1}{\Omega \cdot m}$ |
| 6. * | Heat capacity c_p at $400^\circ K$ | $397.5 \frac{J}{kg \cdot K}$ |
| 7. * | Thermal conductivity k_T at $400^\circ K$ | $393 \frac{W}{m \cdot K}$ |

[*] “Handbook of Physical Quantities”, Ed. by Igor S. Grigoriev and Evgenii Z. Melnikov, Russian Research Center “Kurchatov Institute”, Moscow, Russia. CRC press, Boca Raton, New York, London, Tokio (ISBN 0-8493-2861-6)

For lithium coated copper shell

$$\Delta T_{Li} = q_{wall} \sqrt{\frac{4t_{exposure}}{\pi \kappa \rho c_p}}, \quad d_{skin} \equiv \sqrt{\frac{\kappa t_{exposure}}{\rho c_p}},$$

Copper in comparison with Li has much higher heat transport

$$(k_T \rho c_p)_{Cu} \simeq 14.00 \left[\frac{J^2}{\text{sec} \cdot K^2 cm^4} \right] \simeq 14 (k_T \rho c_p)_{Li}. \quad (2.4)$$

For the same $\Delta T_{Li} = 200^\circ \text{C}$, the time of exposure is determined by

$$t_{exposure} \simeq 3.5 \left(\frac{3.5 \left[\frac{MW}{m^2} \right]}{q_{wall}} \right)^2 \text{sec}$$

Copper shell allows to have ΔT_{Li} , at least, twice bigger than 200°C .

2 Power extraction. Solid (wetted) lithium coated copper walls (cont.)

Solid lithium coated copper walls give reactor relevant capacities to experimental research machines in both

- particle control, and
- power extraction from the plasma

Even with no active cooling the operation time could be

- 1-4 minutes for the thermal flux $q_{wall} \simeq 1 \text{ MW/m}^2$ (5 times greater than in ITER), and
- 3.5-15 seconds for $q_{wall} \simeq 3.5 \text{ MW/m}^2$ (or 17.5 MW/m^2 of full wall loading).

In terms of plasma physics,

LiWall concept has a transparent path

starting from small scale circular cross-section tokamaks

to the (limited in time) power reactor regime

3 Confinement and stability in low recycling regime

Plasma gettering by LiWalls leads to the high plasma edge temperature

$$\left(\frac{5}{2}\Gamma T\right)_{edge} = \int \int \int_0^a P_E dv, \quad T_{edge} = \frac{\int \int \int_0^a P_E dv}{\frac{5}{2}\Gamma} \quad P_E - \text{heat source.}$$

With LiWalls the major energy loss channel, i.e., thermo-conduction, can be eliminated (S. Krasheninnikov, Dec. 1998).

Plasma profiles are determined by the particle continuity equation



$$\Gamma \equiv S n v = const = (\Gamma)_a$$

and by the energy balance

$$\frac{5}{2}\Gamma T - S(\kappa_T \nabla T + \kappa_n \nabla n) = \int \int \int_0^r P_E dv$$



Two together determine flattened temperature profiles in the plasma.

$$\text{In non-recycling regime } \frac{5}{2} \Gamma T - S(\kappa_T \nabla T + \kappa_n \nabla n) = \int_0^r P dv$$

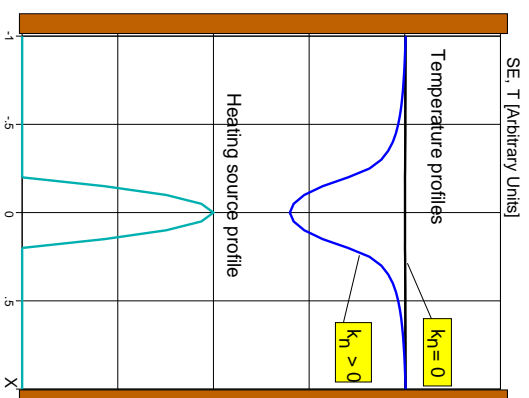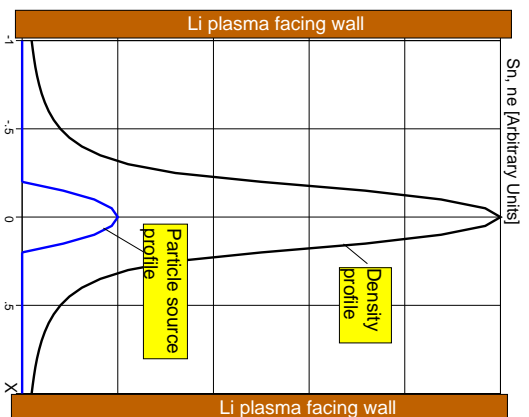

DENSITY profile (left) is predetermined by the central fuelling.


TEMPERATURE profile (right) adjusts itself in order to ELIMINATE the thermo-conduction.

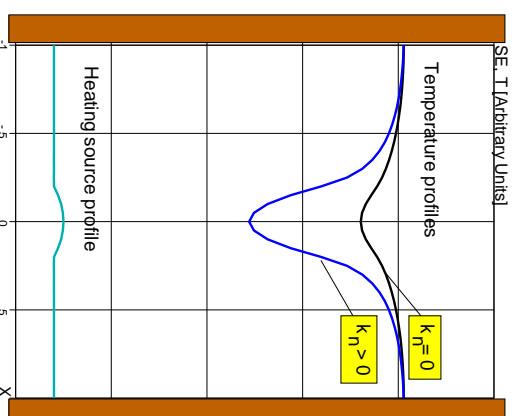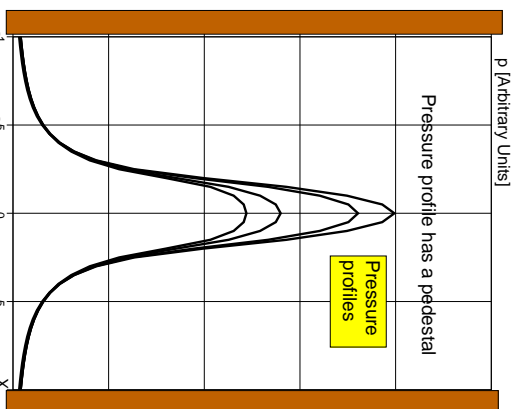

PRESSURE profile (left) has a jump at the plasma boundary.

TEMPERATURE profile (right) eliminates the thermo-conduction irrespective to the heat source profile.

Fixed boundary plasma & flattened temperature profile results in a new core MHD regime:

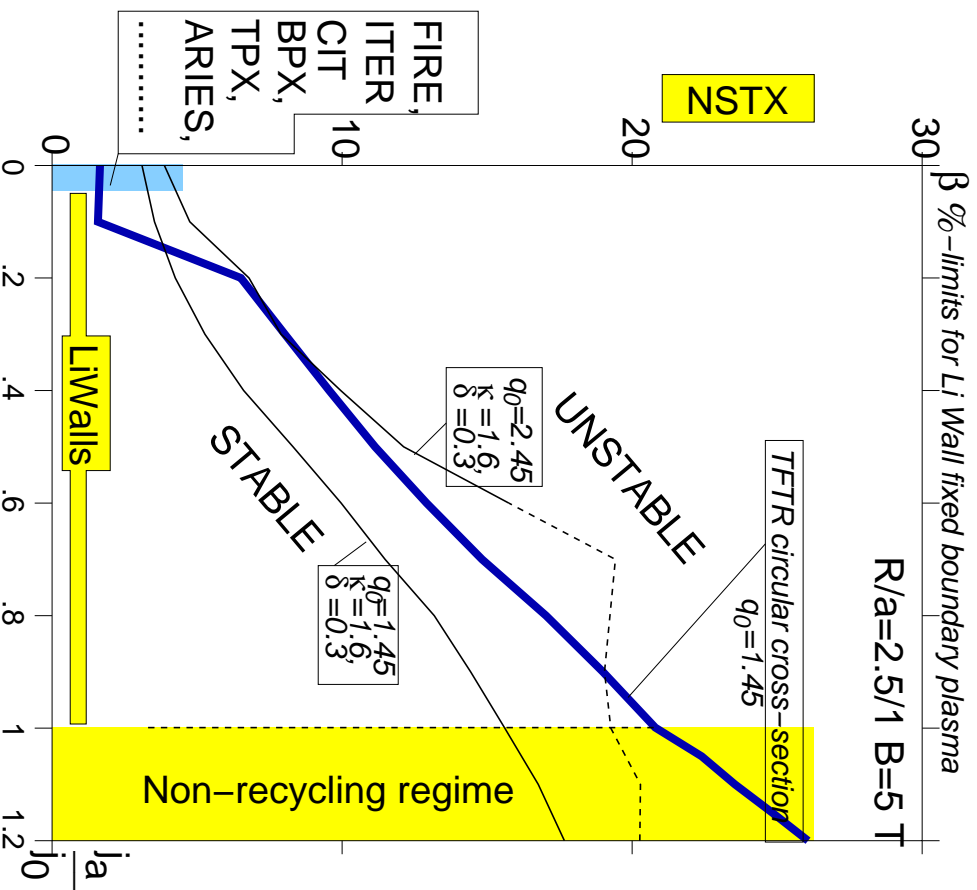




- no sawtooth oscillations;
- no Troyon limit;
- the second stability core;

β - limits for the second stability regime

- fixed boundary plasma
- $n=1,2,3$ + ballooning modes (DCON, PEST-2, BALLON, ESC)
- current density with an edge pedestal

$$j_{||} = j_a + (j_0 - j_a) \left(1 - \frac{r^2}{a^2} \right)$$

Current density profiles has been chosen as determined by the classical Ohm's law

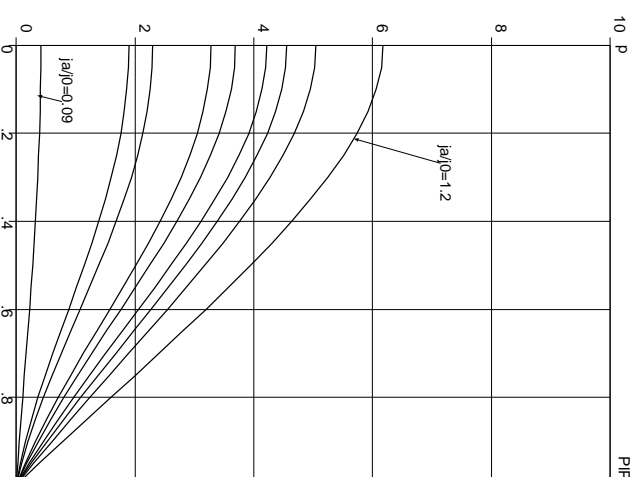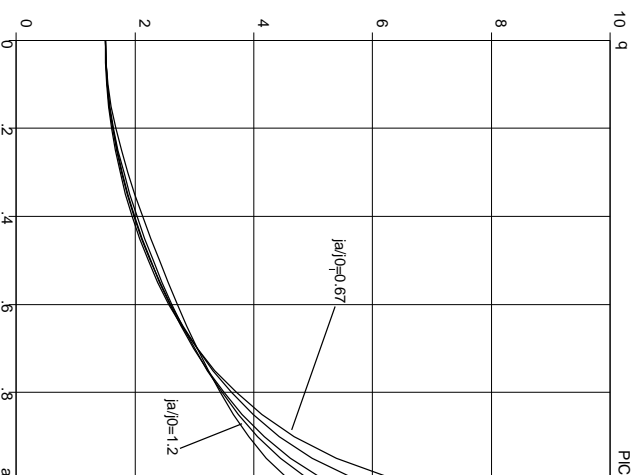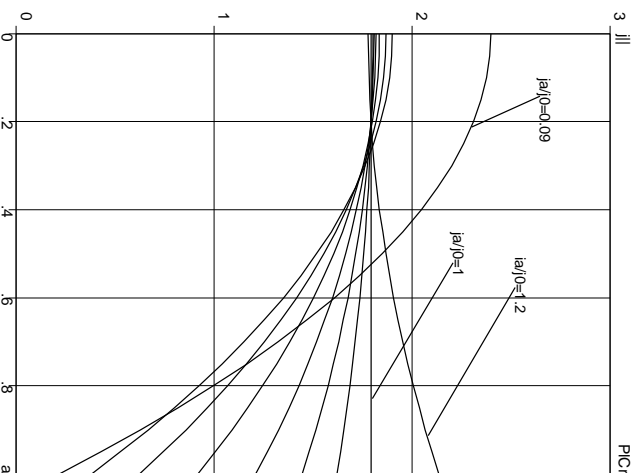


$j_{||}$ -profiles

q -profiles


p -profiles

$$\frac{dp}{d\Psi} = \text{const}, \quad a = \sqrt{\frac{\Phi}{\Phi_{edge}}}, \quad \Phi \text{ is the toroidal flux.} \quad (3.1)$$

Marginally stable high β configurations

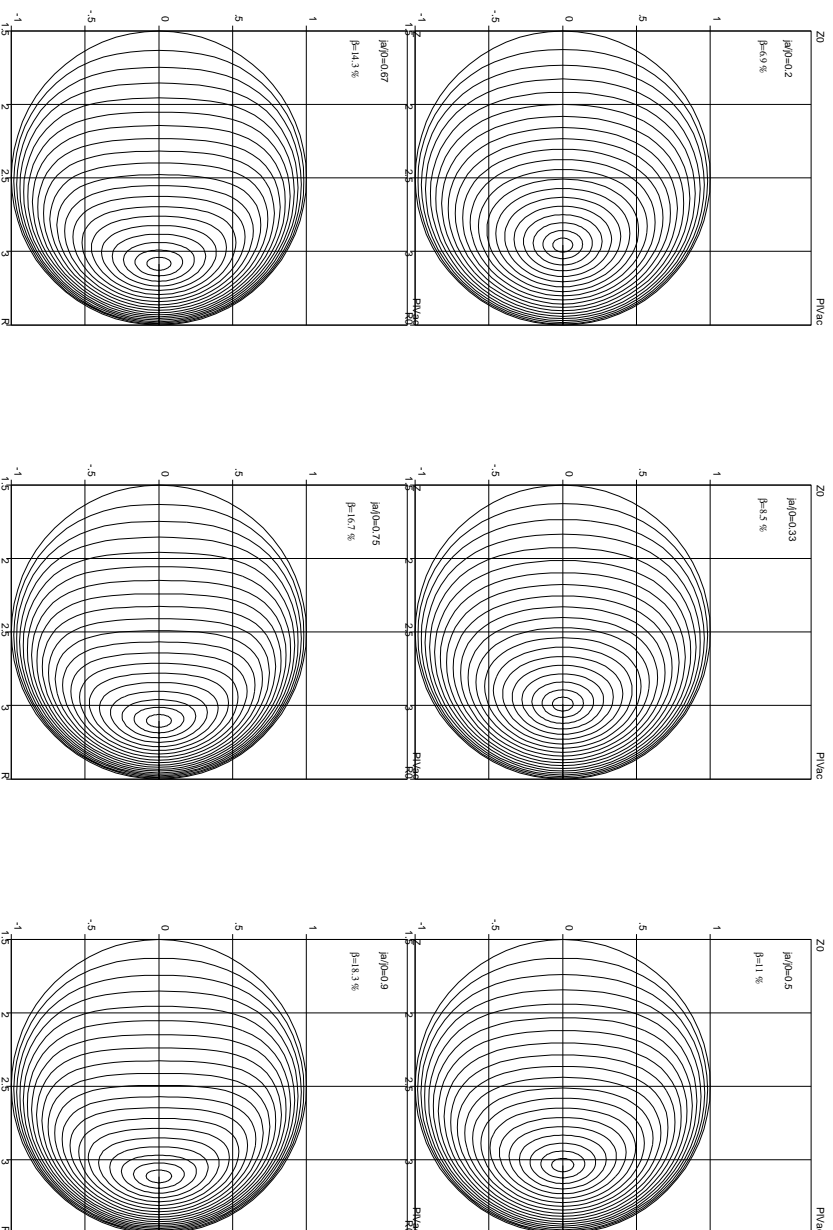


Marginally stable high β configurations

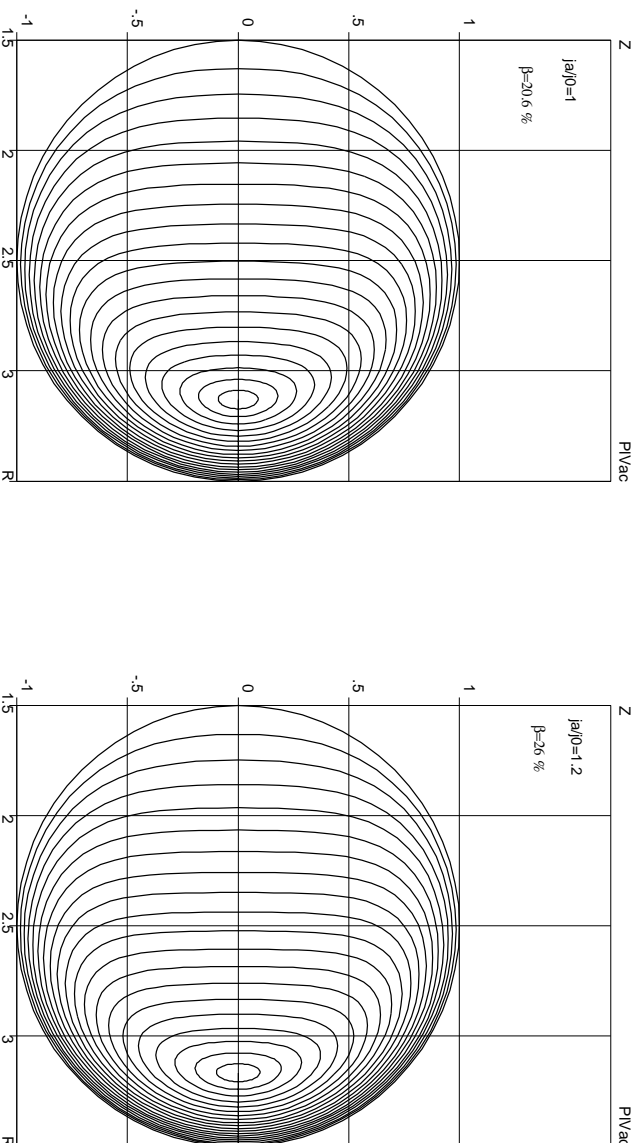

Configurations relevant
to the non-recycling regime

Fixed boundary plasma & flattened temperature profile results in a new core MHD regime:

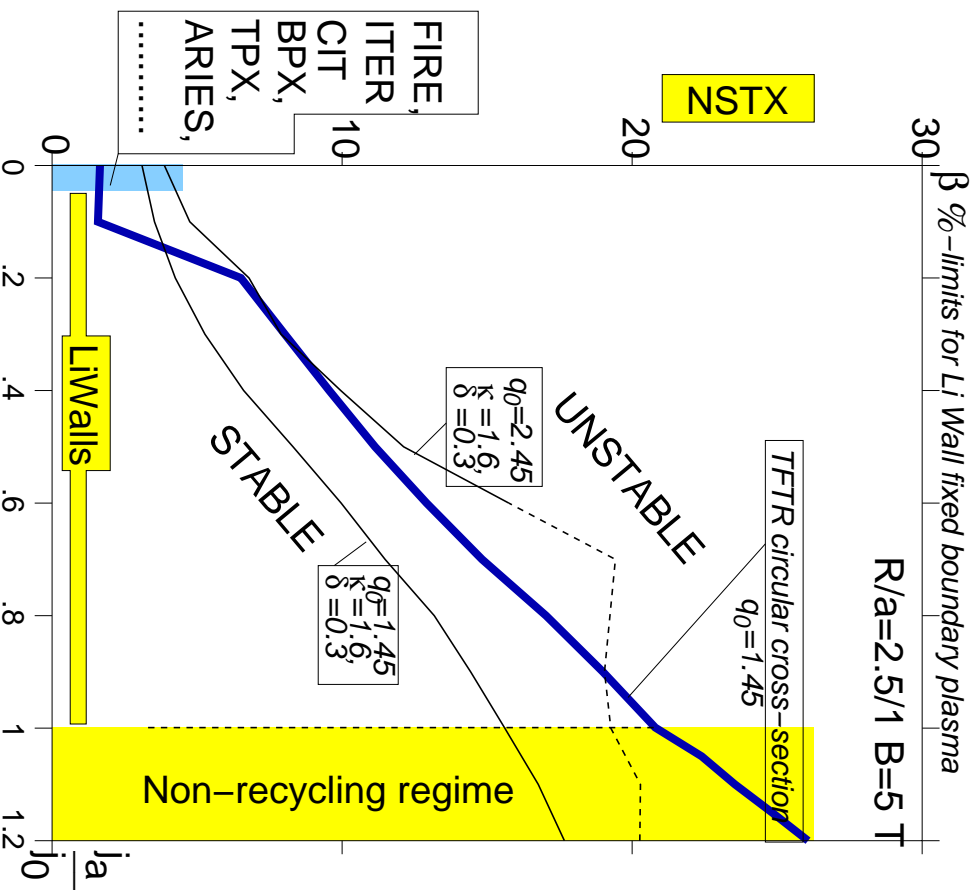

- no sawtooth oscillations;
- no Troyon limit;
- the second stability core;

β - limits for the second stability regime

- fixed boundary plasma
- $n=1,2,3$ + ballooning modes (DCON,PEST-2,BALLON,ESC)
- current density with an edge pedestal

$$j_{||} = j_a + (j_0 - j_a) \left(1 - \frac{r^2}{a^2} \right)$$

Within β limits enhancement of τ_E is very beneficial for performance.

$$n \propto \tau_E, \quad nT_{TE} \propto \tau_E^2. \quad (3.2)$$

With lithium coated copper walls installed TFTR could easily pass the breakeven. Doubling τ_E would be sufficient.

4 MHD of liquid lithium. Basic Reynolds numbers.


There 3 magnetic Reynolds numbers which control lithium MHD in toka-maks

dynamics : $\mathfrak{R}_0 \equiv \mu_0 \sigma L V$,

electro-dynamics : $\mathfrak{R}_1 \equiv \mu_0 \sigma h V$,

dynamics : $\mathfrak{R}_2 \equiv \mu_0 \sigma \frac{h^2}{L} V$, (4.1)

$$\mu_0 \sigma \simeq 4 \left[\frac{\text{sec}}{\text{m}^2} \right] \cdot$$

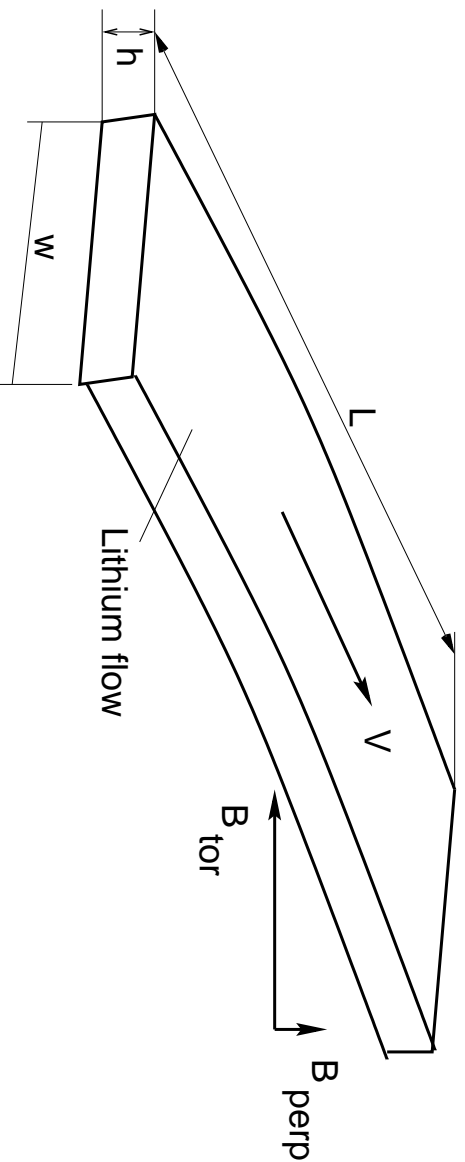

Characteristic flow parameters:

$$\begin{aligned}
 V &= 20 \text{ m/sec} \rightarrow \rho \frac{V^2}{2} \simeq 1 \text{ [atm]}, \\
 B &= 1 \text{ T} \rightarrow \frac{B^2}{2\mu_0} = 4 \text{ [atm]}, \\
 B &= 5 \text{ T} \rightarrow \frac{B^2}{2\mu_0} = 100 \text{ [atm]}.
 \end{aligned} \tag{4.2}$$

Dynamic pressure losses are determined by \Re_0 and \Re_2

$$\begin{aligned}
 \Re_0 : \quad \Delta \rho \frac{V^2}{2} &= \mu_0 \sigma L V \frac{B_{\perp}^2}{2\mu_0}, \\
 \Re_2 : \quad \Delta \rho \frac{V^2}{2} &= \mu_0 \sigma \frac{h^2}{L} V \Delta \frac{B_{\parallel}^2}{2\mu_0}, \\
 \mu_0 \sigma &\simeq 4 \left[\frac{\text{sec}}{\text{m}^2} \right].
 \end{aligned} \tag{4.3}$$

Magnetic fields from the currents in the stream are determined by \Re_1

$$\Re_1 : \quad B_{\parallel \text{out}} - B_{\parallel \text{in}} = \mu_0 \sigma h V B_{\perp}. \tag{4.4}$$


Lithium “water-falls” will not flow through the tokamak strong toroidal field

$$h = 0.1 \text{ m}, \quad L_1 \simeq 0.2 \text{ m}, \quad L_2 \simeq 3 \text{ m}, \quad V > 2 - 5 \text{ [m/sec]},$$

$$\Re_0 = 4L_1 V \Rightarrow 1.6,$$

$$\Re_2 = 4 \frac{h^2}{L_2} V = 4 \frac{h}{L_2} (hV) \simeq 0.01 - 0.025.$$

(4.5)

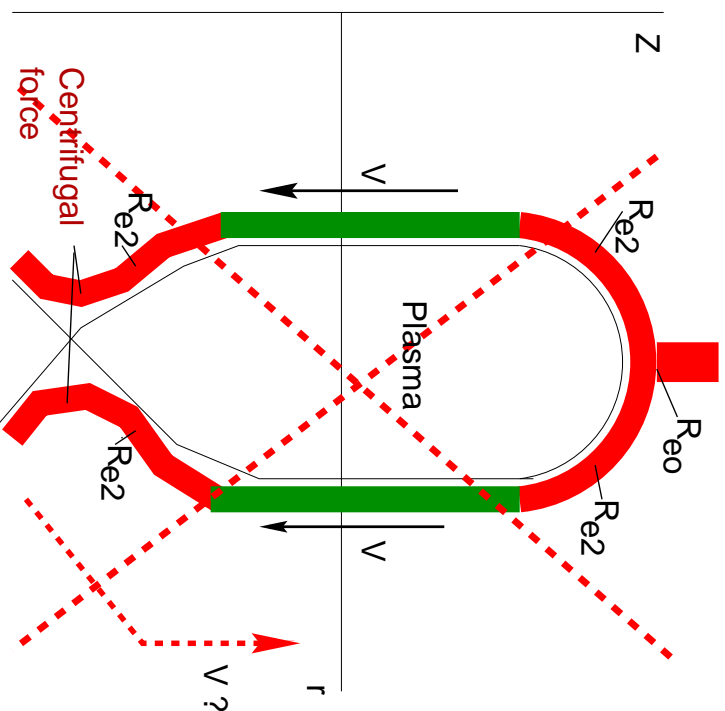


$$\rho \frac{V^2}{2} \ll \Re_2 \Delta \frac{B_{tor}^2}{2\mu_0}$$

Momentum driven thin walls have many of unresolved problems in lithium MHD

$$h = 0.01 \text{ m}, \quad L_1 \simeq 0.02 \text{ m}, \quad L_2 \simeq 3 \text{ m}, \quad V \simeq 20 \text{ [m/sec]},$$

$$\mathfrak{R}_2 = 4 \frac{h^2}{L_2} V \simeq 1.3 \cdot 10^{-4}.$$

(4.6)

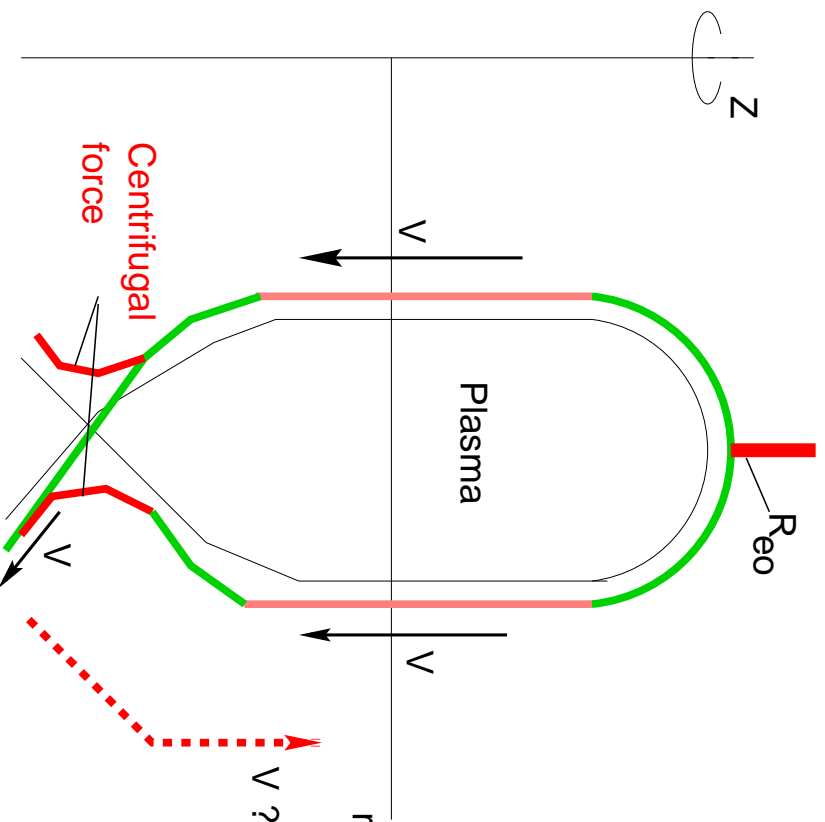

$$\mathfrak{R}_0 = 1.6, \quad \rho \frac{V^2}{2} < \mathfrak{R}_0 \frac{B_{pol}^2}{2\mu_0}$$

$$p_{j \times B}|_{inlet} - p_{j \times B}|_{outlet} \gg \Re_2 \frac{B_{tor}^2}{2\mu_0}, \quad \Re_2 \equiv \mu_0 \sigma \frac{h^2}{R} V \simeq 0.0015$$

- $$p_{j \times B} |_{outlet} > 1 atm$$


$$p_{j \times B}^{inlet} - p_{j \times B}^{outlet} \simeq 1.5 - 3 [atm]$$

- $$V \simeq 20 \text{ m/sec}, \quad h \simeq 0.01 \text{ m}$$

- $$\mathfrak{R}_1 \equiv \mu_0 \sigma h V \gtrsim 0.8, \quad \mathfrak{R}_2 \gtrsim 0.0015$$

- due to centrifugal force

$$\frac{a}{2R} p_{wall} n_r > \frac{\langle V^2 \rangle}{2} \rho$$

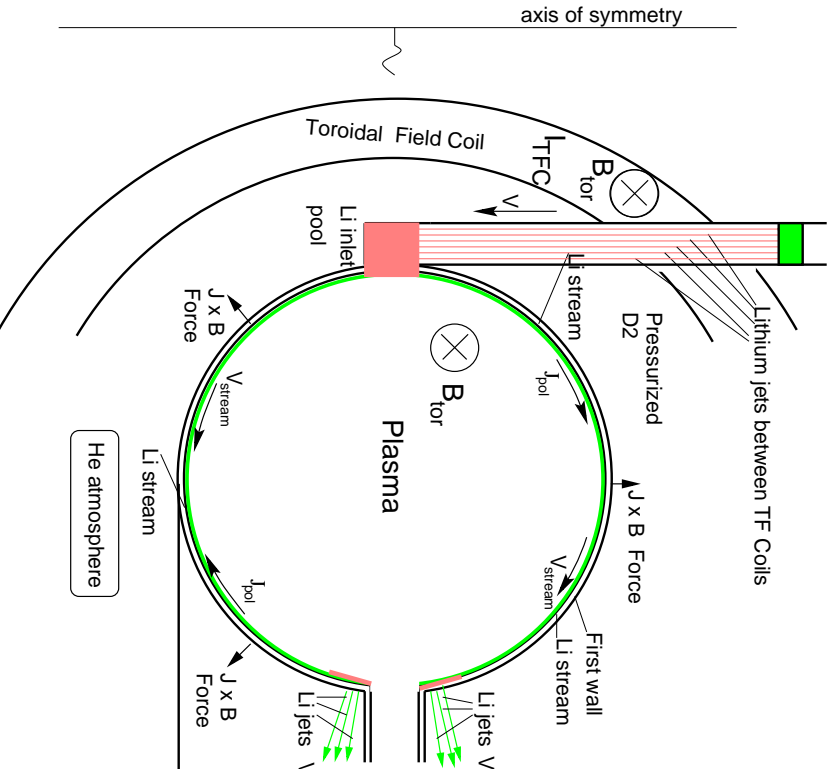

Invention of magnetic propulsion (Dec. 1998) introduced a new "resistive wall" concept with the $m = 1$ -like flow pattern of the liquid metal.


Being insensitive to electromagnetic forces and stable, Intense Li Streams contribute positively to the plasma stability over the full range of frequencies.

The theory was completed and significant stabilization can be expected at

$$\Re_1 = \mu_0 \sigma h V > 1. \quad (4.7)$$


Projected value for the LiWall reactor $\Re_1 = 0.4 - 0.8$.

Stability gaps are insensitive to m-number. Finite β can be stabilized.

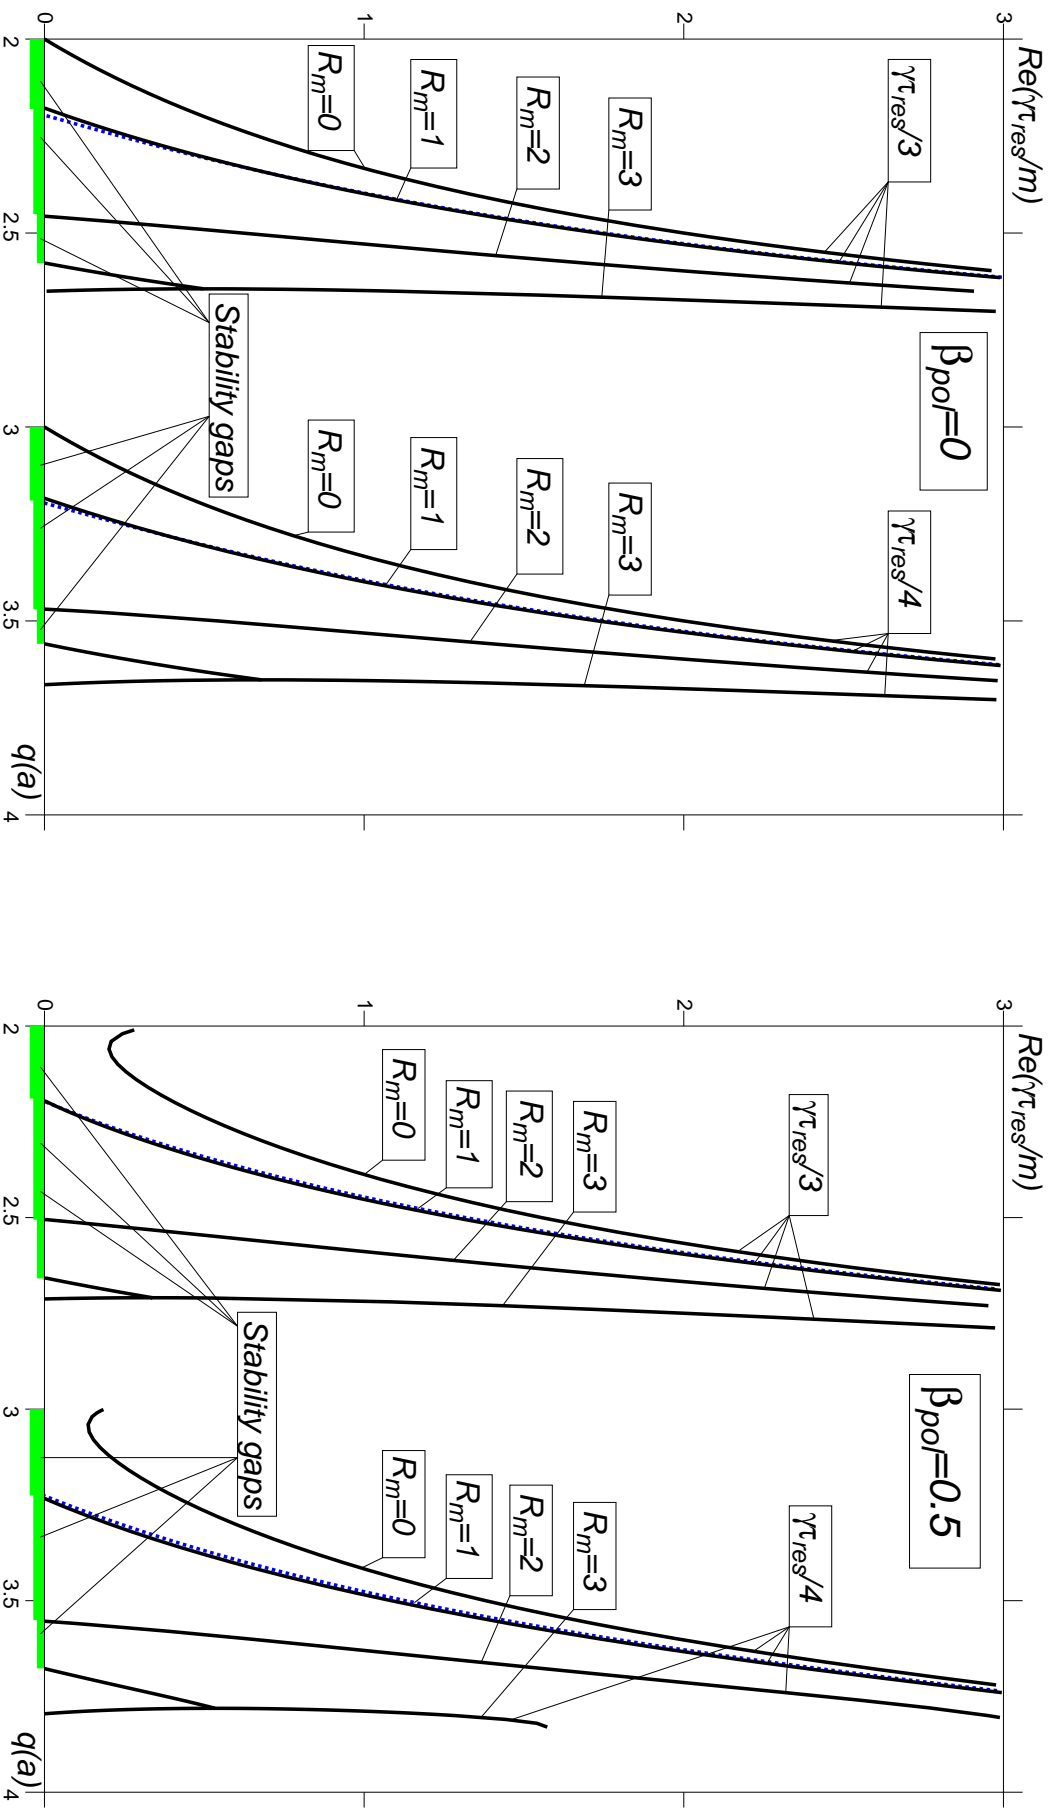

Resistive wall mode is well affected by the flow.


Flow-locked mode determines limits of stabilization.

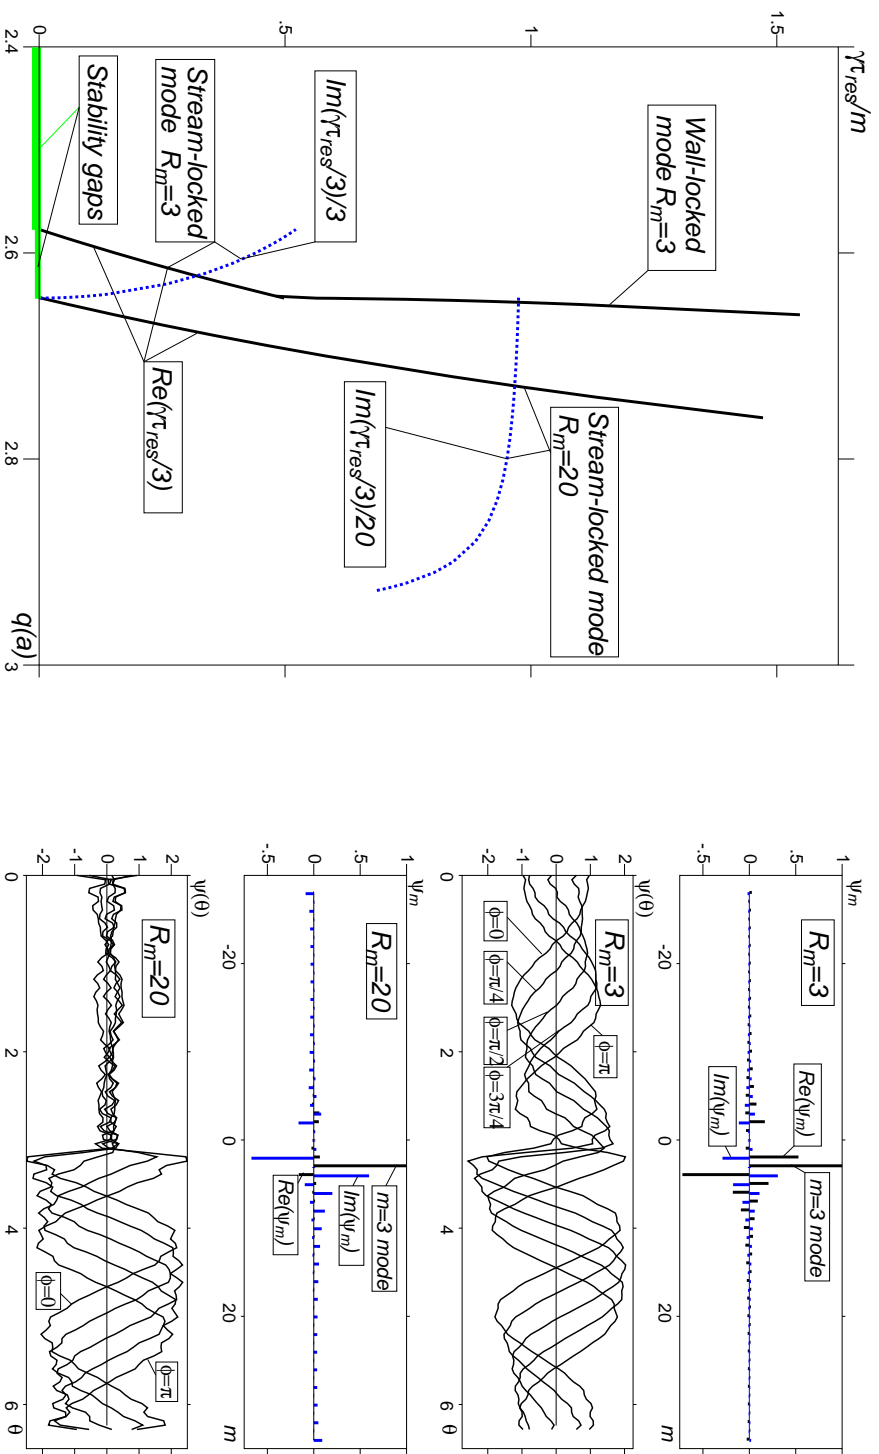

5 Yacht Sail approach for tokamak-reactors.

Intense Li Streams affect the very fundamentals of tokamak reactor desing.

Electrodynamic pressure creates a stable situation for the first wall.

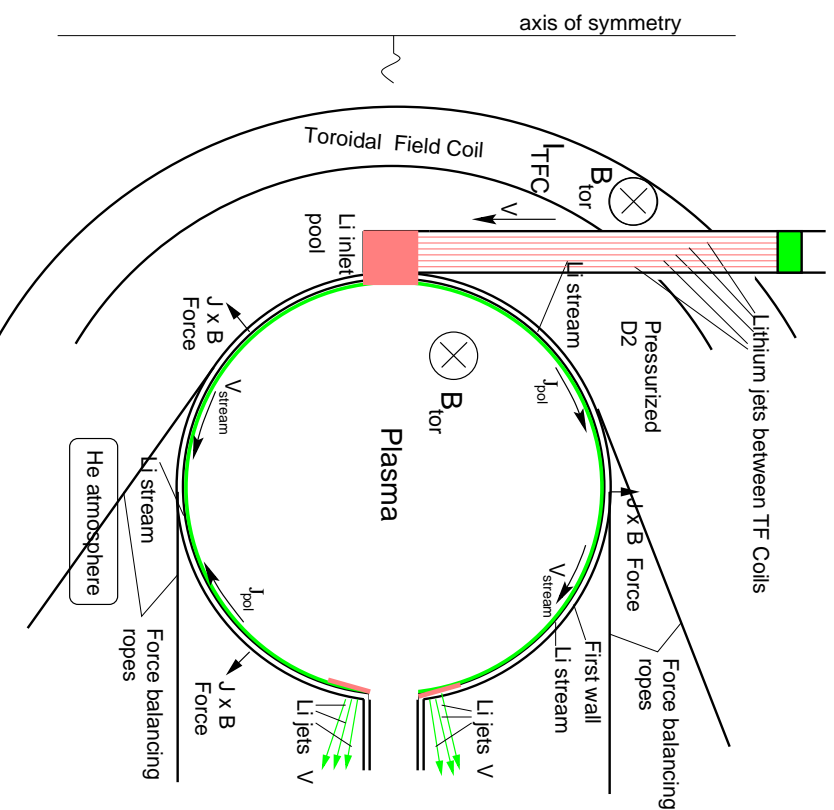

- Guide wall works against expansion \Rightarrow
- Guide wall can be made as a thin shell (like a car tire).
- Inner surface is sealed by the lithium streams (insensitive to cracks) \Rightarrow
- Vacuum barrier can be moved to the plasma boundary (giving access to the neutron zone).


Dynamic balancing is a real 3-D design puzzle.

- Toroidal component of the electro-magnetic force can be balanced by the set of external wire ropes


$$\left(p_{j \times B, outlet} \frac{r_{outlet}^2}{r^2} - p_{atm} \right) \frac{r}{r_{inlet}} = T d,$$

where T is the tension of ropes, $d(r)$ is the total height as the function of position of the touch point.

- Ropes are the best solution to withstand plasma disruptions.
- Ropes can be made from Be (non-activatable).
- Ropes can be replaced during reactor operation.

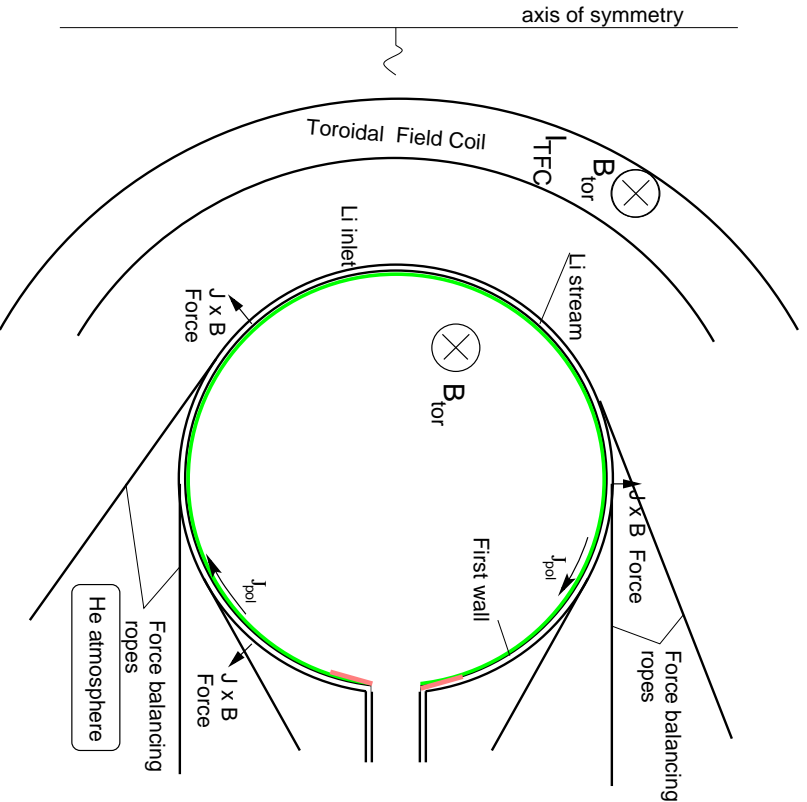

Intense lithium streams + FLiBe make an excellent FW/blanket combination (S.Zinkle, B.Nelson, ORNL)

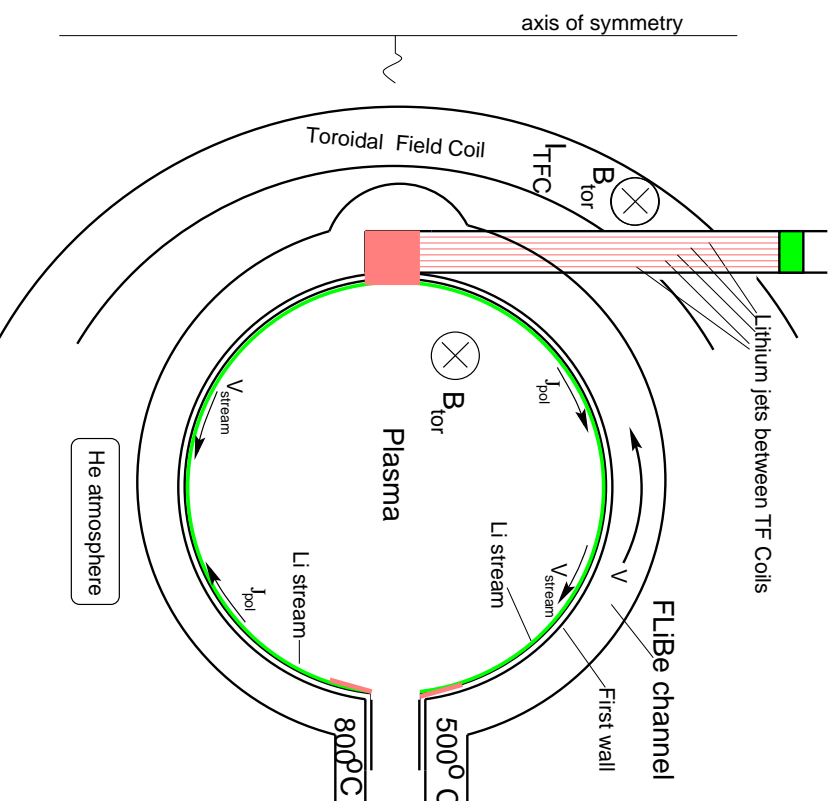

FLiBe:



Lithium streams keep the wall temperature below melting point of FLiBe

$$T_{wall} \simeq 200^\circ - 250^\circ < T_{melt, FLiBe} \simeq$$

Independent of inner temperature in the channel FLiBe has a solid boundary layer at the walls.


Even

with

$$T_{FLiBe|outlet} = 800^\circ C$$

energy losses on the side walls are $\simeq 4\%$.

Stratified geometry of the FLiBe Blanket/Lithium streams

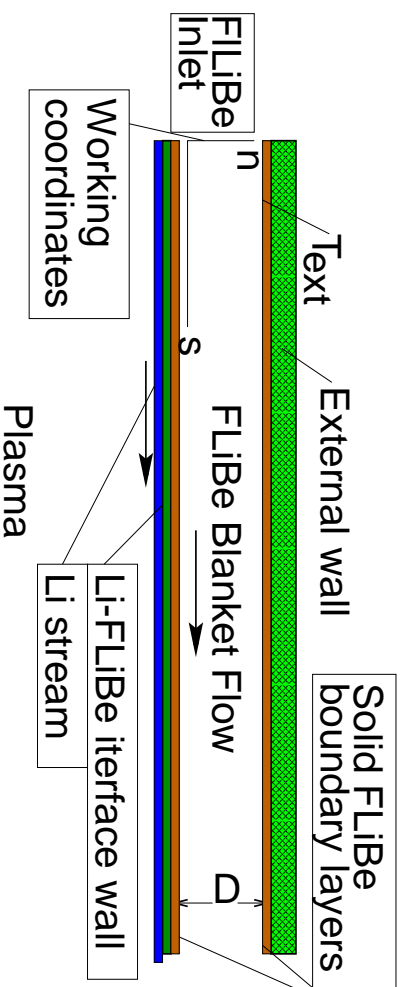

| | | |
|------------------|------------------|--------|
| D | m | 0.1 |
| L | m | 10 |
| V | $\frac{m}{sec}$ | 0.5 |
| $S(n)$ | $\frac{W}{cm^3}$ | 100-40 |
| $T_{side\ wall}$ | C^o | 200 |

The radial thickness D of the channel is assumed to be much smaller than the length L of the channel. Plasma side wall temperature is kept constant by a fast Lithium flow.

Heat source S corresponds approximately to 10 MW/m² in neutrons.

The walls of the channel are kept below the melting point of FLiBe, so two solid salt layers are formed on the walls of the channel.

The stationary heat diffusion equation

$$\begin{aligned} \rho c_p V \frac{\partial T}{\partial s} &= \kappa T''_{nn} + S, \quad T > T_{melt}, \\ 0 &= \kappa T''_{nn} + S, \quad T < T_{melt} \end{aligned} \tag{5.1}$$


together with the matching conditions determines the temperature distribution in the flow.

Here, ρ is the mass density of FLiBe, c_p is the heat capacity, V is the velocity of the flow, κ is the thermo-conduction.

Thickness of the solid layer is determined as an eigenvalue of the problem in a self-consistent way.

| FLiBe parameters | |
|------------------|-------------------------------|
| ρ | $\frac{kg}{m^3}$ 2240 |
| c_p | $\frac{kg \cdot C^o}{J}$ 2380 |
| κ | $\frac{W}{m \cdot C^o}$ 1 |
| T_{melt} | C^o 450 |

Profiles of the (neutron) heat source and T in the FLiBe channel

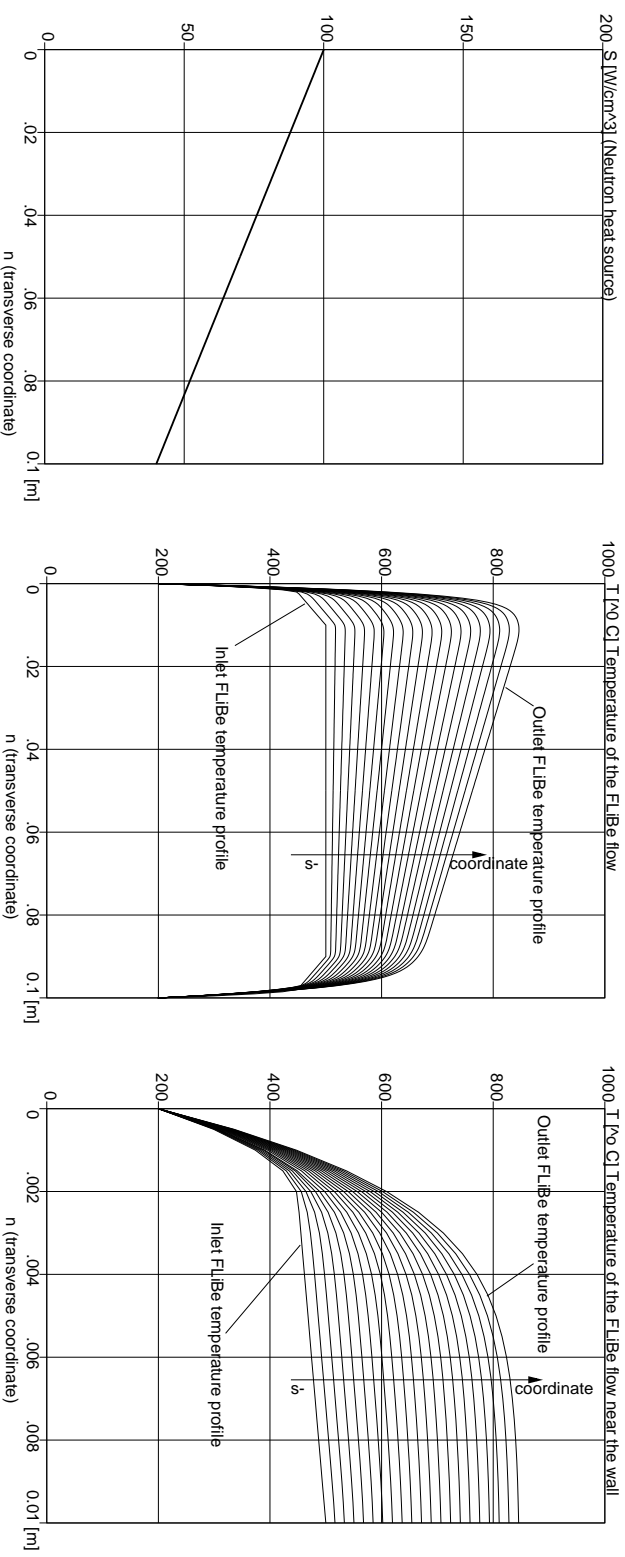

FLiBe thermo-conduction is so small that the temperature inside body of the flow is determined solely by the heat source power

$$\rho c_p V \frac{\partial T}{\partial s} \simeq S, \quad T > T_{melt}, \quad (5.2)$$


not by thermo-conduction losses.

Two boundary layers of the order of 1-3 mm are formed near walls of the channel. Inside, each of them contains a sublayer of a solid FLiBe.

In the example the averaged energy losses are $0.26 \text{ MW}/m^2$ through the plasma side wall and $0.16 \text{ MW}/m^2$ through the Toroidal Field Coil (TFC) side of the wall, which constitute approximately 4 % of the incoming neutron flux energy.


FLiBe seems to be a perfect coolant for the tokamak-reactor

It would be not crazy to think about making the vacuum chamber from the wire mesh

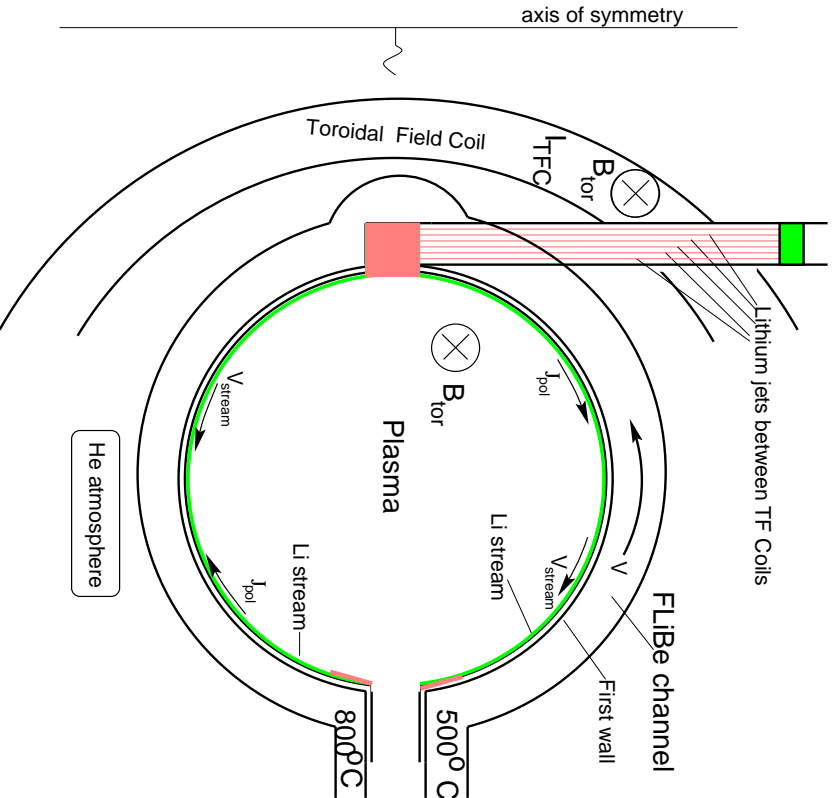

- wall becomes insensitive to thermal deformations \Rightarrow pulsed regime is acceptable (no high-tech for the current drive);
- deformations of the wall can be corrected on the fly (Yacht sail approach);

LiWall Tokamak is not a hostage of the requirement to be stationary.

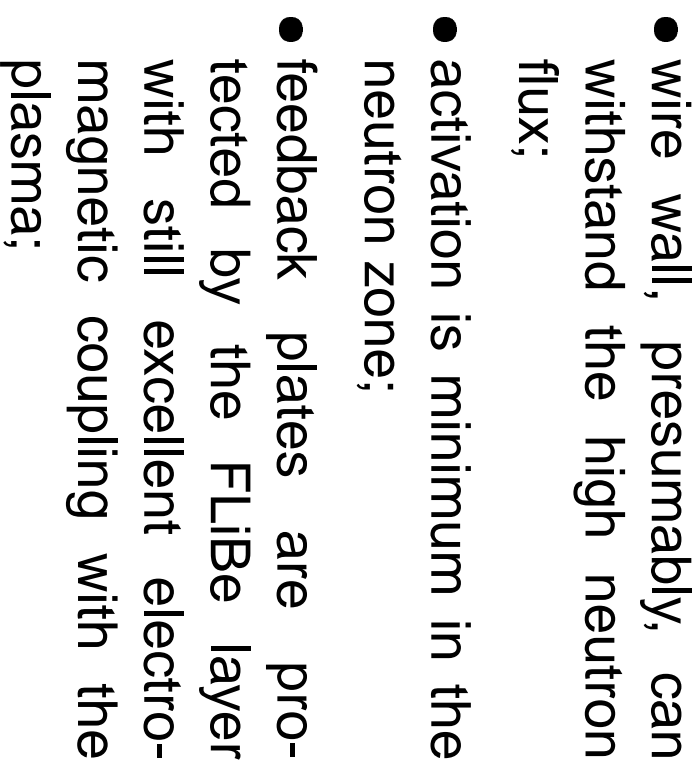

6 Summary

LiWall concept

opens a “high- $\beta \cdot \tau_E$ ” path to the power fusion reactor
(with a lot of work to be done)

For the first time, the renewable and absorbing plasma facing walls were introduced into the tokamak research.

From the plasma physics side, lithium walls may provide


- a low recycling regime (best possible for energy confinement);
- low-Z plasma facing surface (with a central plasma fueling and surface impurities source);
- reactor relevant power extraction capabilities from the plasma
- wall conditions, which are not sensitive to the edge plasma temperature as soon as it exceeds a certain level (about 1 keV).
- slowing down free-boundary MHD instabilities,
- etc,

LiWalls, for the first time, introduce

the “Yacht Sail” approach for the fusion reactor

as a solution to the 50 year old problem of the “first wall” in magnetic fusion.

Yacht Sail approach for the fusion reactor:

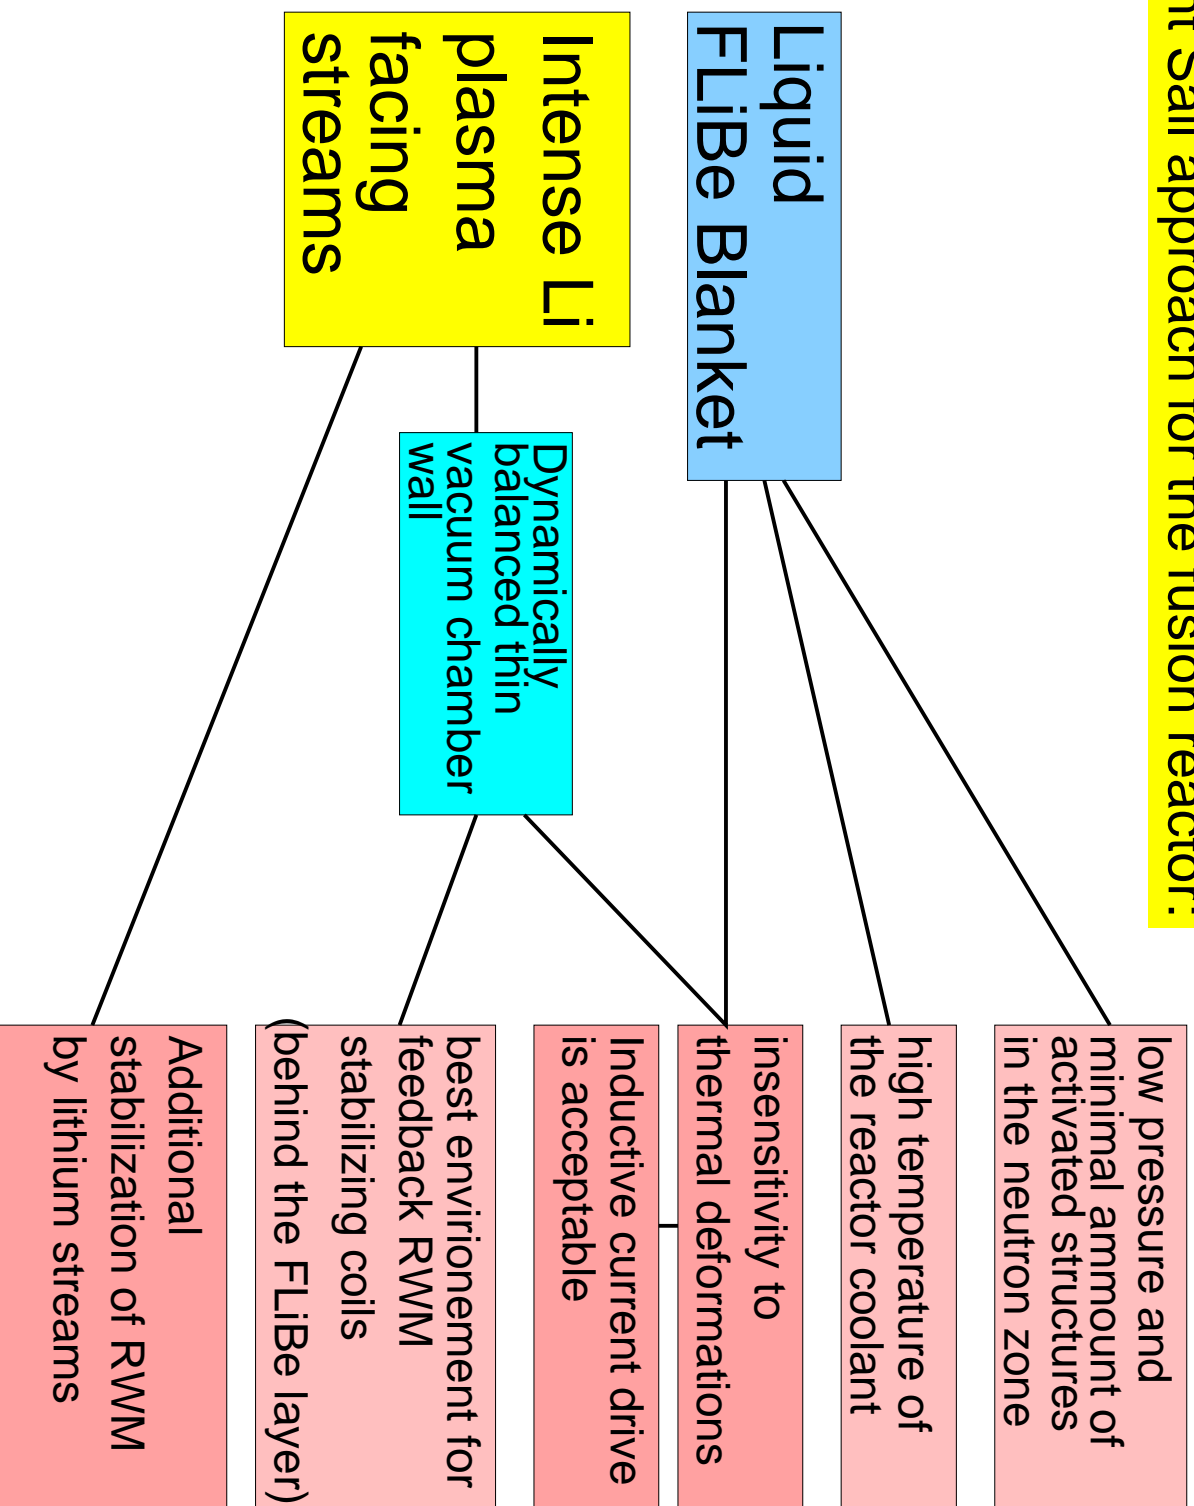

7 Does the tokamak fusion have a path ?

Citing Sean Connery

"It (*magnetic fusion*, *LZ*) is impossible",

"... but doable"

(S. Connery, "Entrapment", TWENTIETH CENTURY FOX and REGENCY ENTERPRISES, 1999)